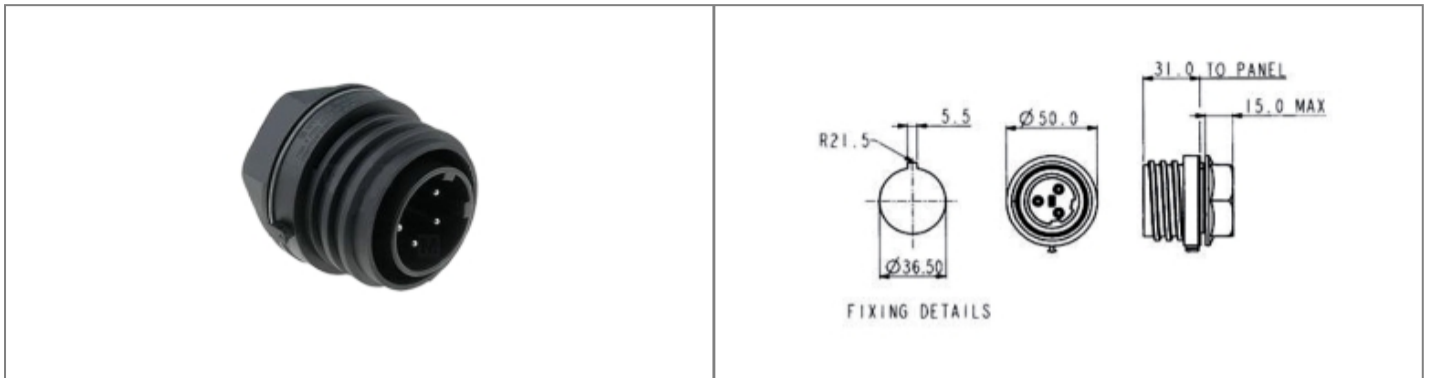


Product Name // Panel Mount Connector EXP-0931 Series
3 Contact Plug
[View Product Page](#)

// Product Description:

- ⊕ Panel Mount Connectors for hazardous areas
- ⊕ Water and dustproof to IP68 when mated with compatible connector
- ⊕ Positive fast-acting locking ring - can be turned with a gloved hand
- ⊕ Plug or Socket
- ⊕ 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- ⊕ Single hole fitting, anti-rotation key
- ⊕ Panel thickness 3mm-7mm
- ⊕ Supplied with high grade sealing gasket
- ⊕ EXP-0992 heavy duty Sealing Cap available separately to maintain IP68 rating of unmated connectors
- ⊕ Mate with EXP-0911 and EXP-A911 Series Flex Connectors

// General Information:

| | |
|---------------------------------|--|
| Product Display Title: | Panel Mount Connectors for hazardous areas |
| Product Family: | Circular Power Connectors |
| Product Series: | EXPlora |
| Approvals: | UL |
| Body Material: | Polyester (PET) |
| Body Material Type: | Plastic Body |
| Contact Type: | Plug Contact |
| Coupling Type: | Screw |
| Current Max: | 18A |
| Diameter Over Coupling Ring Mm: | 58mm |
| Flamability Rating: | UL94V-0 |
| Function: | Front Panel Mount Connector |
| Ip Rating: | IP68 |
| Max Contact Accomodation Awg: | 14AWG |
| Min Contact Accomodation Awg: | 10AWG |
| Max Contact Accomodation Mm2: | 4mm2 |
| Min Contact Accomodation Mm2: | 2.5mm2 |
| Max Operating Temperature: | +55°C |
| Min Operating Temperature: | -20°C |
| Number Of Contacts: | 3 Contacts |
| Voltage Max: | 600V |

// Product PDF Links
[EXP-lora Series power connectors...](#)
// Product 3D CAD Model Links
[EXP-0931/03/P3D CAD Model](#)