
EXP-0931/04/P Datasheet



Product Name // Panel Mount Connector EXP-0931 Series **4 Contact Plug**





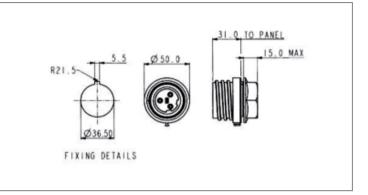

// Product Description:

- O Panel Mount Connectors for hazardous areas
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Positive fast-acting locking ring - can be turned with a gloved hand
- O Plug or Socket
- 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- Ô Single hole fitting, anti-rotation key
- O Panel thickness 3mm-7mm
- 0 Supplied with high grade sealing gasket
- EXP-0992 heavy duty Sealing Cap available separately to maintain IP68 rating of unmated connectors
- \bigcirc Mate with EXP-0911 and EXP-A911 Series Flex Connectors

General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function: Ip Rating:

Max Contact Accomodation Awa: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Number Of Contacts: Voltage Max:

Panel Mount Connectors for hazardous areas

Circular Power Connectors

EXPlora

UL

Polyester (PET)

Plastic Body

Plug Contact Screw

18A

58mm

UL94V-0

Front Panel Mount Connector

IP68

14AWG

10AWG 4mm2

2.5mm2

+55°C

-20°C 4 Contacts

600V

// Product PDF Links



// Product 3D CAD Model Links



EXP-0931/04/P3D CAD Model