
# EXP-0941/03/S Datasheet



# Product Name // Flange Mount Connector EXP-0941

# **Series 3 Contact Socket**

### View Product Page

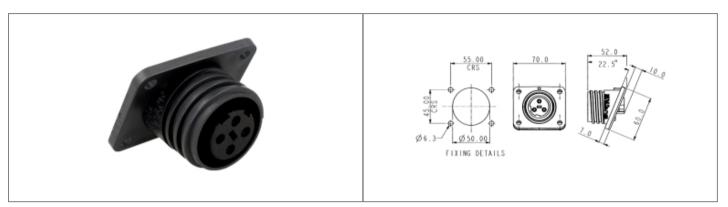

#### // Product Description:

- O Flange Mount Connectors for hazardous areas
- O Water and dustproof to IP68 when mated with compatible connector
- O Positive fast-acting locking ring can be turned with a gloved hand
- O Plug or Socket
- 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- O Supplied with high grade sealing gasket
- Supplied with sealing grommets for panel fixing screws (M6 thread recommended)
- EXP-0992 heavy duty Sealing Cap available separately to maintain IP68 rating of unmated connectors
- O Mate with EXP-0911 and EXP-A911 Series Flex Connectors

#### // General Information:

Product Display Title: **Product Family: Product Series:** Approvals: Body Material: **Body Material Type:** Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Ip Rating: Max Contact Accomodation Awa: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:

Flange Mount Connectors for hazardous areas **Circular Power Connectors** EXPlora UL Polyester (PET) Plastic Body Socket Contact Screw 18A 58mm UL94V-0 Flange Mount Connector IP68 14AWG 10AWG 4mm2 2.5mm2 +55°C -20°C 3 Contacts 600V

#### // Product PDF Links

EXPlora Series power connectors..

// Product 3D CAD Model Links

EXP-0941/03/S3D CAD Model