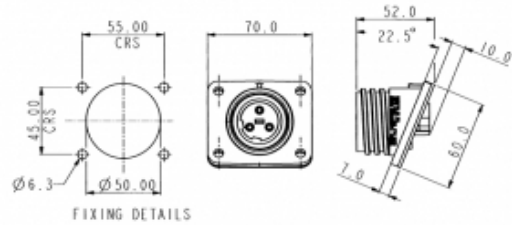


EXP-0941/10/S Datasheet

Product Name // Flange Mount Connector EXP-0941 Series 10 Contact Socket

[View Product Page](#)


// Product Description:

- ⊕ Flange Mount Connectors for hazardous areas
- ⊕ Water and dustproof to IP68 when mated with compatible connector
- ⊕ Positive fast-acting locking ring - can be turned with a gloved hand
- ⊕ Plug or Socket
- ⊕ 2, 3, 4, 5, 7, 10 Contact with leading Earth on 3, 4, 5, 7 Contact versions, trailing Neutral on 5 Contact version
- ⊕ Supplied with high grade sealing gasket
- ⊕ Supplied with sealing grommets for panel fixing screws (M6 thread recommended)
- ⊕ EXP-0992 heavy duty Sealing Cap available separately to maintain IP68 rating of unmated connectors
- ⊕ Mate with EXP-0911 and EXP-A911 Series Flex Connectors

// General Information:

| | |
|---------------------------------|---|
| Product Display Title: | Flange Mount Connectors for hazardous areas |
| Product Family: | Circular Power Connectors |
| Product Series: | EXPLora |
| Approvals: | UL |
| Body Material: | Polyester (PET) |
| Body Material Type: | Plastic Body |
| Contact Type: | Socket Contact |
| Coupling Type: | Screw |
| Current Max: | 10A |
| Diameter Over Coupling Ring Mm: | 58mm |
| Flamability Rating: | UL94V-0 |
| Function: | Flange Mount Connector |
| Ip Rating: | IP68 |
| Max Operating Temperature: | +55°C |
| Min Operating Temperature: | -20°C |
| Number Of Contacts: | 10 Contacts |
| Voltage Max: | 250V |

// Product PDF Links

[EXPLora Series power connectors...](#)

// Product 3D CAD Model Links

[EXP-0941/10/S3D CAD Model](#)