


PF0011/30/48 Datasheet

Product Name // IEC Connector Snap Fit To Panel Fused
Inlet PF0011 Series 3mm Panel Black 4.8mm Tab
Termination EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)

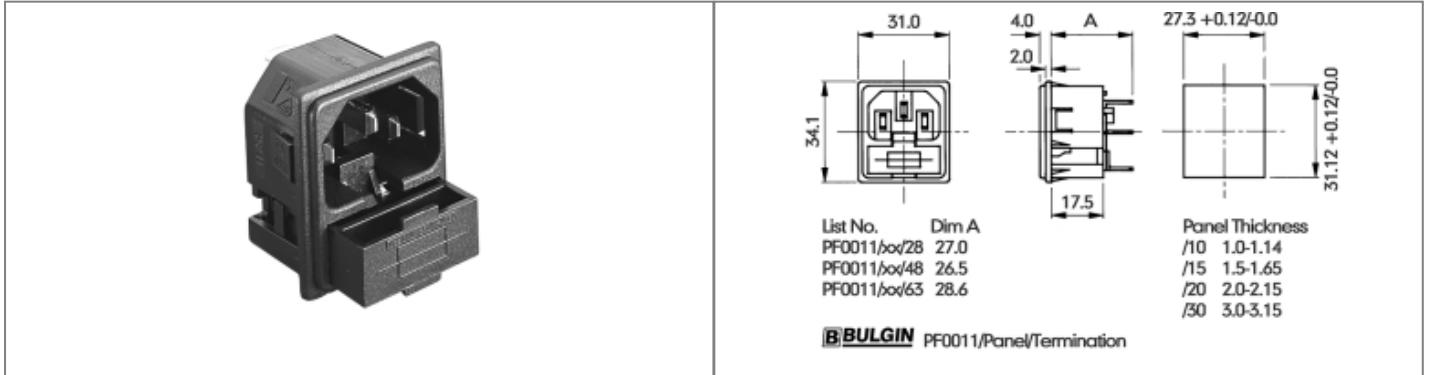

// Product Description:

- ⊞ Snap Fit Panel Mount Fused IEC Inlets
- ⊞ EN60 320-1 Standard Sheet C14 Class I
- ⊞ Cold Condition
- ⊞ Single 5mm x 20mm fuse with spare fuse facility
- ⊞ Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- ⊞ Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /PC - PCB Spills
- ⊞ Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- ⊞ Insulation Boot for rear of connector available separately (part code 11987) for all versions except PCB Mount
- ⊞ Mate with PX0587, PX0587/SE, PX0588

// General Information:

| | |
|----------------------------|---------------------------------------|
| Product Display Title: | Snap Fit Panel Mount Fused IEC Inlets |
| Product Family: | IEC Connectors |
| Product Series: | IEC60320 Main Inlets and Outlets |
| Approvals: | CSA, ENEC, UL, VDE, CCC |
| Body Material: | Nylon 66 |
| Current Max: | 10A |
| Flamability Rating: | UL94V-0 |
| Function: | Panel Mount Fused Connector |
| iec Connector Colour: | Black |
| iec Connector Mates With: | PX0587, PX0587/SE, PX0588 |
| iec En60620 Type: | EN60 320-1 Standard Sheet C14 Class I |
| Max Operating Temperature: | +70°C |
| Min Operating Temperature: | -40°C |
| Max Panel Thickness: | 3mm |
| Min Panel Thickness: | 3mm |
| Number Of Contacts: | 3 Contacts |
| Voltage Max: | 250V |

// Product PDF Links

 [IEC Connectors product data](#)

// Product 3D CAD Model Links

 [PF0011/30/483D CAD Model](#)