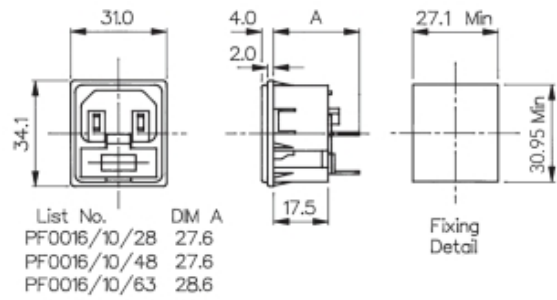


**Product Name // IEC Connector Snap Fit To Panel Fused
Inlet 2 Pin PF0016 Series 2mm Panel Black 2.8mm Solder
Tag Termination EN60 320-1 Standard Sheet C18 Class II**

[View Product Page](#)


// Product Description:

- ⊗ Snap Fit Panel Mount Fused IEC Inlets
- ⊗ EN60 320-1 Standard Sheet C18 Class II
- ⊗ Cold Condition
- ⊗ Two Pin Class II (no Earth pin)
- ⊗ Single 5mm x 20mm fuse
- ⊗ Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- ⊗ Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- ⊗ Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colours only - see data for details)
- ⊗ Insulation Boot for rear of connector available separately (part code 11987)
- ⊗ Mate with PX0587, PX0587/SE, PX0588

// General Information:

Product Display Title:	Snap Fit Panel Mount Fused IEC Inlets
Product Family:	IEC Connectors
Product Series:	IEC60320 Main Inlets and Outlets
Approvals:	CSA, ENEC, UL, VDE, RCM
Body Material:	Nylon 66
Current Max:	10A
Flamability Rating:	UL94V-0
Function:	Panel Mount Fused Connector
iec Connector Colour:	Black
iec Connector Mates With:	PX0587,PX0587/SE,PX0588
iec En60620 Type:	EN60 320-1 Standard Sheet C18 Class II
Max Operating Temperature:	+70°C
Min Operating Temperature:	-40°C
Max Panel Thickness:	2mm
Min Panel Thickness:	2mm
Number Of Contacts:	2 Contacts
Voltage Max:	250V

// Product PDF Links

[IEC Connectors product data](#)

// Product 3D CAD Model Links

[PF0016/20/283D CAD Model](#)

// Product Certificate Links

[VDE Certificate](#)
[UL E92187 Certificate](#)
[CSA Certificate](#)
[CE Certificate](#)


Have a question or project enquiry
you'd like to talk to us about?

[Click Here To Contact Us](#)