
# PX0410/02P/3035 Datasheet



## Product Name // Flex Cable Connector PX0410 Series 2 Contact Plug 3.0mm-3.5mm Cable

### View Product Page

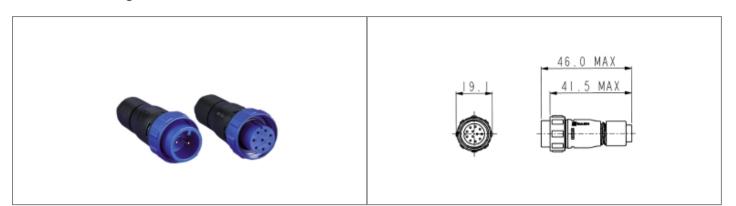

#### // Product Description:

- O Flex Cable Connector
- O Water and dustproof to IP68 when mated with compatible connector
- O Pin or Socket
- **O** 2, 3, 4, 6, 8, 10 or 12 Contact
- Crimp or Solder Contacts available (supplied separately; use 8A for 2/3 Contact, 5A for 4/6/8 Contact, 1A for 10/12 Contact)
- O Contact insertion and crimp tools available (supplied separately)
- Choice of cable acceptance 3mm-7mm depending on part code; supplied with Cable Gland and Collet colour coded by size
- O PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Inline or Panel Mount Connectors PX0401, PX0411, PX0412, PX0413

#### // General Information:

Product Display Title:
Product Family:
Product Series:
Approvals:
Body Material:
Body Material Type:
Contact Type:
Coupling Type:
Current Max:
Diameter Over Coupling Ring Mm:
Flamability Rating:
Function:
Ip Rating:
Max Cable Entry Size:
Min Cable Entry Size:
Max Contact Accomodation Awg:
Min Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Min Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:
Number Of Contacts:
Voltage Max:

Flex Cable Connector **Circular Power Connectors** 400 Series Buccaneer UL Polyamide (PA) Plastic Body Plug Contact Screw 8A 19.1mm UL94V-0 Flex Cable Connector IP68 3.5mm 3.0mm 24AWG 20AWG 0.5mm2 0.25mm2 +80°C -40°C 2 Contacts 250V

#### // Product PDF Links

400 Series power conr

400 Series power connectors wiring...

// Product 3D CAD Model Links

PX0410/02P/30353D CAD Model