
PX0410/02S/3540 Datasheet



Product Name // Flex Cable Connector PX0410 Series 2 Contact Socket 3.5mm-4.0mm Cable

View Product Page

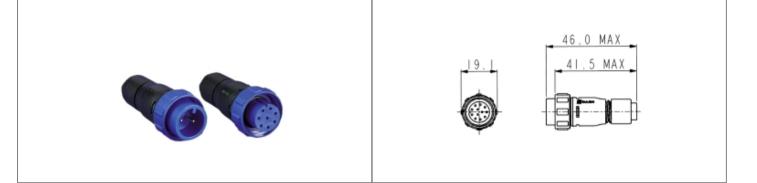

// Product Description:

- 0 Flex Cable Connector
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Pin or Socket
- 0 2, 3, 4, 6, 8, 10 or 12 Contact
- 0 Crimp or Solder Contacts available (supplied separately; use 8A for 2/3 Contact, 5A for 4/6/8 Contact, 1A for 10/12 Contact)
- Contact insertion and crimp tools available (supplied separately)
- 0 Choice of cable acceptance 3mm-7mm depending on part code; supplied with Cable Gland and Collet colour coded by size
- 0 PX0481 Sealing Cap available separately to maintain IP rating of
- Mate with Inline or Panel Mount Connectors PX0401, PX0411, PX0412, PX0413

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Body Material Type: Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:

Min Contact Accomodation Awg: Max Contact Accomodation Mm2:

Min Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Flex Cable Connector

Circular Power Connectors 400 Series Buccaneer

Polyamide (PA)

Plastic Body

Socket Contact

Screw

8A

19.1mm

UL94V-0

Flex Cable Connector

IP68 4.0mm

3.5mm

24AWG

20AWG

0.5mm2 0.25mm2

+80°C

-40°C

2 Contacts 250V

// Product PDF Links





400 Series power connectors wiring...

// Product 3D CAD Model Links

