
PX0410/03P/3035 Datasheet



Product Name // Flex Cable Connector PX0410 Series 3 Contact Plug 3.0mm-3.5mm Cable

View Product Page

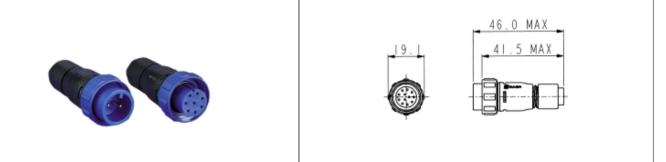

// Product Description:

- 0 Flex Cable Connector
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Pin or Socket
- 0 2, 3, 4, 6, 8, 10 or 12 Contact
- 0 Crimp or Solder Contacts available (supplied separately; use 8A for 2/3 Contact, 5A for 4/6/8 Contact, 1A for 10/12 Contact)
- Contact insertion and crimp tools available (supplied separately)
- 0 Choice of cable acceptance 3mm-7mm depending on part code; supplied with Cable Gland and Collet colour coded by size
- 0 PX0481 Sealing Cap available separately to maintain IP rating of
- Mate with Inline or Panel Mount Connectors PX0401, PX0411, PX0412, PX0413

// General Information:

Product Display Title: Product Family:

Product Series:

Approvals: **Body Material:**

Body Material Type:

Contact Type:

Coupling Type: **Current Max:**

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:

Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: **Max Operating Temperature:**

Min Operating Temperature: **Number Of Contacts:**

Voltage Max:

Flex Cable Connector

Circular Power Connectors

400 Series Buccaneer

Polyamide (PA)

Plastic Body

Plug Contact

Screw **8A**

19.1mm

UL94V-0

Flex Cable Connector

IP68 3.5mm

3.0mm

24AWG

20AWG

0.5mm2 0.25mm2

+80°C

-40°C

3 Contacts

250V

// Product PDF Links





400 Series power connectors wiring...

// Product 3D CAD Model Links

