
# PX0700/P/06 Datasheet



## Product Name // Pre-Wired Overmould Flex Cable Connector PX0700 Series 6 Contact Plug Black Insert

View Product Page

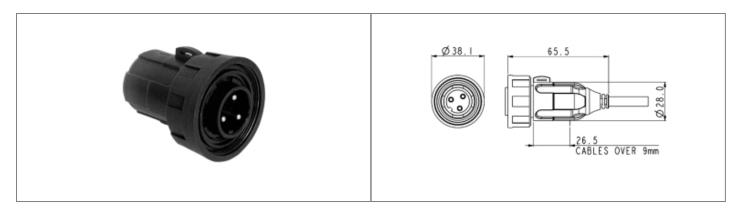

### // Product Description:

- O Pre-Wired Overmoulded Flex Connector cable assemblies
- O Water and dustproof to IP68 when mated with compatible connector
- O Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- O Cable acceptance up to 14mm diameter with PVC or PU jackets
- O PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PX07 Series Inline and Panel Mount Connectors

### // General Information:

Product Display Title: Product Family: **Product Series:** Approvals: Body Material: Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Insert Colour: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:

Pre-Wired Overmoulded Flex Connector cable assemblies **Circular Power Connectors** Standard Buccaneer CSA, UL, VDE Polyamide (PA)- Glass Filled Plug Contact Screw 3A, 5A 38.1mm UL94HB Flex Connector Single Ended Cable Black Insert IP68, IP69K +70°C -20°C 6 Contacts 277V

#### // Product PDF Links

Standard Series power connectors...

// Product 3D CAD Model Links

PX0700/P/063D CAD Model