


# PX0793/28 Datasheet

**Product Name // IEC Connector Flange Mount Shuttered Outlet PX0793 Series Black 2.8mm Solder Tag Termination EN60 320-2-2 Standard Sheet F Class I**

[View Product Page](#)

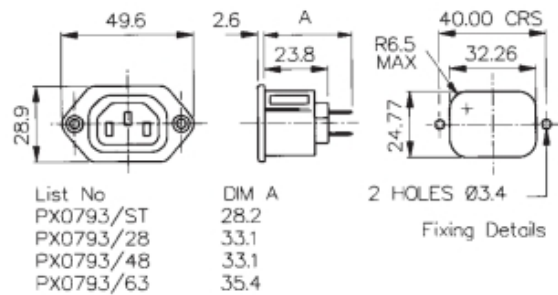

## // Product Description:

- ⊕ Flange Mount IEC Shuttered Outlets
- ⊕ EN60 320-2-2 Standard Sheet F Class I
- ⊕ Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /ST - Solder Tag
- ⊕ Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colour and/or Termination choices only - see data for details)
- ⊕ Choice of standard or rectangular flange mount depending on part code (rectangular flange part codes contain /1)
- ⊕ Insulation Boot for rear of connector available separately (part code 12075)
- ⊕ Blanking Cover for front of connector available separately (part code 14228)
- ⊕ Retaining Clip KT0006 available separately to prevent accidental removal of mating connector (for use with PX0686 Female Connector only)
- ⊕ Mate with PX0685, PX0686, PX0686/SE

## // General Information:

|                            |                                       |
|----------------------------|---------------------------------------|
| Product Display Title:     | Flange Mount IEC Shuttered Outlets    |
| Product Family:            | IEC Connectors                        |
| Product Series:            | IEC60320 Main Inlets and Outlets      |
| Approvals:                 | CSA, ENEC, UL, VDE                    |
| Body Material:             | Nylon 66                              |
| Current Max:               | 10A, 15A                              |
| Flamability Rating:        | UL94V-0                               |
| Function:                  | Flange Mount Connector                |
| iec Connector Colour:      | Black                                 |
| iec Connector Mates With:  | PX0685, PX0686, PX0686/SE             |
| iec En60620 Type:          | EN60 320-2-2 Standard Sheet F Class I |
| Max Operating Temperature: | +70°C                                 |
| Min Operating Temperature: | -40°C                                 |
| Number Of Contacts:        | 3 Contacts                            |
| Voltage Max:               | 250V                                  |

### // Product PDF Links

[IEC Connectors product data](#)

### // Product 3D CAD Model Links

[PX0793/283D CAD Model](#)