
PXEB5200MM4550 Datasheet



Product Name // 2 Channel Plug Connector

View Product Page



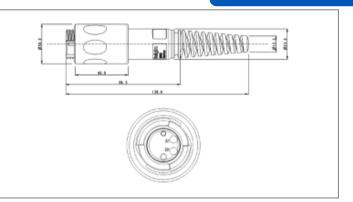

// Product Description:

- 0 Non-terminated Plug Connector for a 2-Channel Multimode Cable with 4.5-5mm Diameter
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- 0 Compatible with OM1 & OM3
- 0 Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- 0 Mates with Plug, Jam Nut, and Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 4 Channel
- 0 Cable Assembly Available

General Information:

Product Display Title: 2 Channel Plug Connector **Product Family:** Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam Max Insertion Loss: <2dB

<1.5dB Ava Insertion Loss: **Body Colour:** Dark Grey **Body Material:**

Polycarbonate/Polybutylene Terephthalate (PC/PBT) **Body Material Type:** Plastic Body

Contact Type: **Expanded Beam** Coupling Type: Screw

Diameter Over Coupling Ring Mm: 30mm Fibre Mode: MM

Flamability Rating: UL94V-0 Function: **EB Plug Connector** Ip Rating: IP68 Material Finish: Matt Max Cable Entry Size: 5mm

Min Cable Entry Size: 4.5mm Max Operating Temperature: Min Operating Temperature: -50°C Rohs Compliant: Yes

// Product 3D CAD Model Links

+80°C

5000 Series Expanded Beam Product... PXEB5200MM45503D CAD Model



// Product PDF Links