
PXEB5202B005 Datasheet



Product Name // 2 Channel Plug to LC Connector Cable **Assembly**





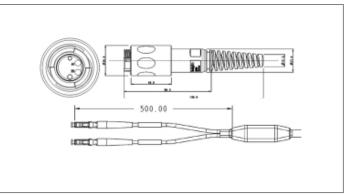

// Product Description:

- A Terminated Plug Connector with a 2-Channel OM1 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 5m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- 0 Operating Temperature -50°C to +80°C
- 0 Available in 4 Channel
- O Available in Plug to Plug & Plug to SC Cable Assembly

// General Information:

Product Display Title: 2 Channel Plug to LC Connector Cable Assembly

Product Family: Circular Fiber Connectors **Product Series:** 5000 Series Expanded Beam

Max Insertion Loss: <2dB Avg Insertion Loss: <1.5dB **Body Colour:** Dark Grev

Body Material: Polycarbonate/Polybutylene Terephthalate (PC/PBT) **Body Material Type:** Plastic Body

Contact Type: Expanded Beam Coupling Type: Screw

30mm Diameter Over Coupling Ring Mm: OM1 Fibre Mode: Flamability Rating: UL94V-0

Function: EB Plug to LC Double Ended Fiber Cable IP68 Ip Rating:

Material Finish: Matt +80°C Max Operating Temperature: Min Operating Temperature: -50°C

Rohs Compliant: Yes

// Product 3D CAD Model Links

PXEB5202B0053D CAD Model 5000 Series Expanded Beam Product.

// Product PDF Links