
PXEB5202C005 Datasheet



Product Name // 2 Channel Plug to LC Connector Cable Assembly





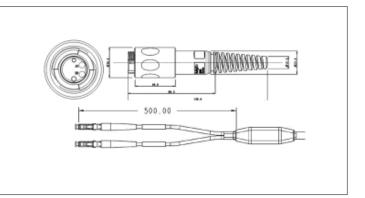

// Product Description:

- A Terminated Plug Connector with a 2-Channel OM3 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations 5m Long Cable Assembly
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Dust Cap for all Connectors & Plug Lanyard Included
- Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- Operating Temperature -50°C to +80°C
- Available in 4 Channel
- O Available in Plug to Plug & Plug to SC Cable Assembly

// General Information:

Product Display Title: 2 Channel Plug to LC Connector Cable Assembly

 Product Family:
 Circular Fiber Connectors

 Product Series:
 5000 Series Expanded Beam

Max Insertion Loss:<2dB</th>Avg Insertion Loss:<1.5dB</td>Body Colour:Dark Grey

Body Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Contact Type: Expanded Beam
Coupling Type: Screw
Diameter Over Coupling Ring Mm: 30mm

Diameter Over Coupling Ring Mm:30mmFibre Mode:OM3Flamability Rating:UL94V-0

Function: EB Plug to LC Double Ended Fiber Cable

Ip Rating: IP68

Material Finish: Matt
Max Operating Temperature: +80°C
Min Operating Temperature: -50°C

// Product PDF Links

5000 Series Expanded Beam Product...

Rohs Compliant:

// Product 3D CAD Model Links

PXEB5202C0053D CAD Model

Yes