
PXEB5220MM Datasheet

Product Name // 2 Channel Flange Mount Bulkhead Connector

View Product Page

bulgin

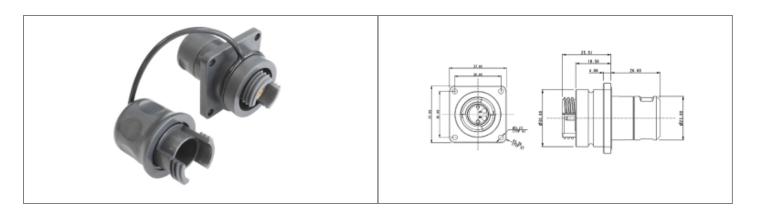

// Product Description:

- O Non-terminated Flange Mount Bulkhead Connector for 2 Multimode patch leads
- O Designed to MIL-DTL83526D
- O Compatible with any connector that follows MIL-DTL83526D
- O Compatible with OM1 & OM3
- O Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- O Mates with Plug Connectors (hermaphroditic)
- O Operating Temperature -50°C to +80°C
- O Available in 4 Channel
- O Cable Assembly Available

/ General Information:

Product Display Title: Product Family: **Product Series:** Max Insertion Loss: Avg Insertion Loss: Body Colour: **Body Material:** Body Material Type: Contact Type: Coupling Type: Diameter Over Coupling Ring Mm: Fibre Mode: Flamability Rating: Function: Ip Rating: Material Finish: Max Operating Temperature: Min Operating Temperature: **Rohs Compliant:**

2 Channel Flange Mount Bulkhead Connector **Circular Fiber Connectors** 5000 Series Expanded Beam <2dB <1.5dB Dark Grey Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Expanded Beam Screw 30mm MM UL94V-0 EB Flange Mount Bulkhead Connector IP68 Matt +80°C -50°C Yes

// Product PDF Links

5000 Series Expanded Beam Product...

// Product 3D CAD Model Links

PXEB5220MM3D CAD Model