


PXEB5222C002 Datasheet

Product Name // 2 Channel Flange Mount to LC Connector Cable Assembly

[View Product Page](#)

* Representative product image only

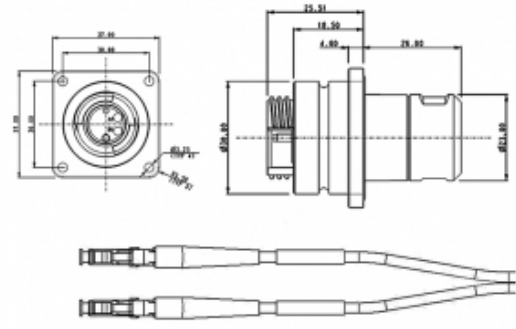

// Product Description:

- ⊕ A Terminated Flange Mount Bulkhead (FMBH) Connector with 2 (OM3) LC terminated independent cables - 2m Long Cable Assembly
- ⊕ Designed to MIL-DTL83526D
- ⊕ Compatible with any connector that follows MIL-DTL83526D
- ⊕ Dust Cap for all Connectors & Flange Mount Lanyard Included
- ⊕ Mates with Plug Connectors (hermaphroditic)
- ⊕ Operating Temperature -50°C to +80°C
- ⊕ Available in 2 Channel
- ⊕ Available in Flange Mount to SC Cable Assembly

// General Information:

| | |
|---------------------------------|-------------------------------------------------------|
| Product Display Title: | 2 Channel Flange Mount to LC Connector Cable Assembly |
| Product Family: | Circular Fiber Connectors |
| Product Series: | 5000 Series Expanded Beam |
| Max Insertion Loss: | <2dB |
| Avg Insertion Loss: | <1.5dB |
| Body Colour: | Dark Grey |
| Body Material: | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| Body Material Type: | Plastic Body |
| Contact Type: | Expanded Beam |
| Coupling Type: | Screw |
| Diameter Over Coupling Ring Mm: | 30mm |
| Fibre Mode: | OM3 |
| Flamability Rating: | UL94V-0 |
| Function: | EB Flange Mount to LC Double Ended Fiber Cable |
| Ip Rating: | IP68 |
| Material Finish: | Matt |
| Max Operating Temperature: | +80°C |
| Min Operating Temperature: | -50°C |
| Rohs Compliant: | Yes |

// Product PDF Links

[5000 Series Expanded Beam Product...](#)

// Product 3D CAD Model Links

[PXEB5222C0023D CAD Model](#)