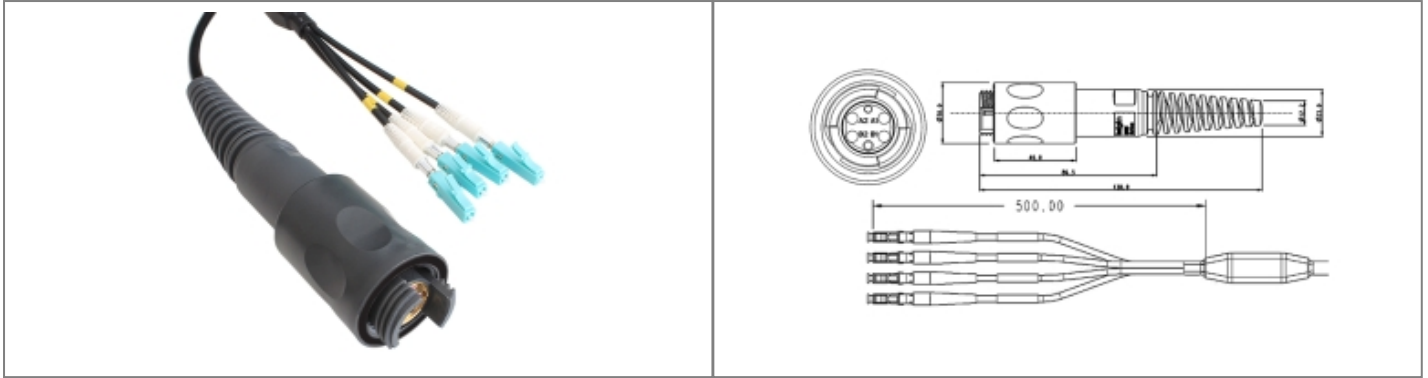


## Product Name // 4 Channel Plug to LC Connector Cable Assembly

[View Product Page](#)


### // Product Description:

- ⊕ A Terminated Plug Connector with a 4-Channel OM1 Outdoor Tactical Cable that breaks out in 2 independent cables (0.5m long) with LC Terminations - 25m Long Cable Assembly
- ⊕ Designed to MIL-DTL83526D
- ⊕ Compatible with any connector that follows MIL-DTL83526D
- ⊕ Dust Cap for all Connectors & Plug Lanyard Included
- ⊕ Mates with Plug, Jam Nut, & Flange Mount Connectors (hermaphroditic)
- ⊕ Operating Temperature -50°C to +80°C
- ⊕ Available in 2 Channel
- ⊕ Available in Plug to Plug & Plug to SC Cable Assembly

### // General Information:

|                                 |   |
|---------------------------------|---|
| Product Display Title:          | 4 Channel Plug to LC Connector Cable Assembly     |
| Product Family:                 | Circular Fiber Connectors                         |
| Product Series:                 | 5000 Series Expanded Beam                         |
| Max Insertion Loss:             | <2dB  |
| Avg Insertion Loss:             | <1.5dB  |
| Body Colour:                    | Dark Grey   |
| Body Material:                  | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| Body Material Type:             | Plastic Body                                      |
| Contact Type:                   | Expanded Beam                                     |
| Coupling Type:                  | Screw   |
| Diameter Over Coupling Ring Mm: | 30mm  |
| Fibre Mode:                     | OM1   |
| Flamability Rating:             | UL94V-0   |
| Function:                       | EB Plug to LC Double Ended Fiber Cable            |
| Ip Rating:                      | IP68  |
| Material Finish:                | Matt  |
| Max Operating Temperature:      | +80°C   |
| Min Operating Temperature:      | -50°C   |
| Rohs Compliant:                 | Yes   |

#### // Product PDF Links

[5000 Series Expanded Beam Product...](#)

#### // Product 3D CAD Model Links

[PXEB5402B0253D CAD Model](#)