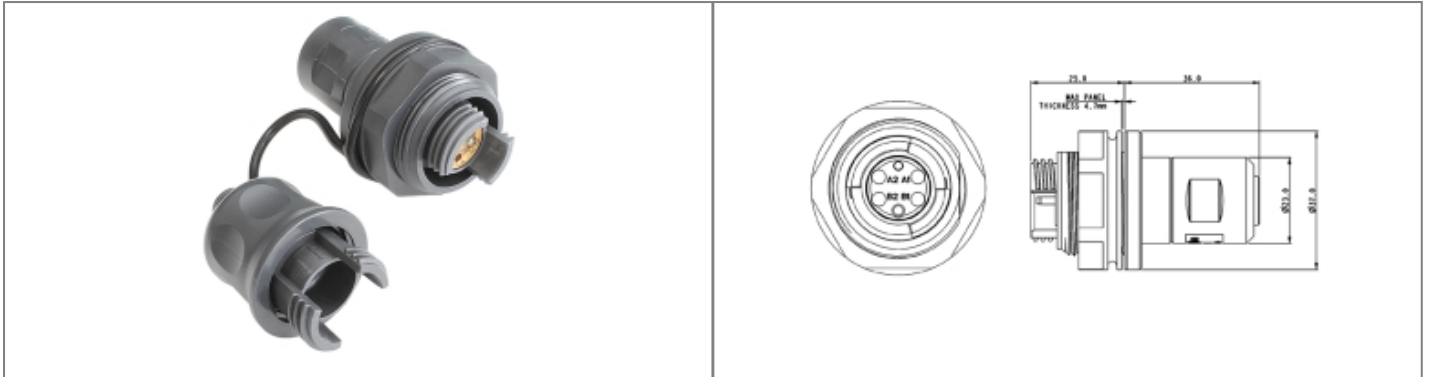


**Product Name // 4 Channel Jam Nut Bulkhead Connector with Cable Retention**
[View Product Page](#)

**// Product Description:**

- ⬡ Non-terminated Jam Nut Bulkhead Connector for a 4-Channel Multimode Cable with 4.5-5mm Diameter
- ⬡ Designed to MIL-DTL83526D
- ⬡ Compatible with any connector that follows MIL-DTL83526D
- ⬡ Compatible with OM1 & OM3
- ⬡ Dust Cap, Lanyard, and Ferrules (termini) for the Cable Included
- ⬡ Mates with Plug Connectors (hermaphroditic)
- ⬡ Operating Temperature -50°C to +80°C
- ⬡ Available in 2 Channel

**// General Information:**

<b>Product Display Title:</b>	4 Channel Jam Nut Bulkhead Connector with Cable Retention
<b>Product Family:</b>	Circular Fiber Connectors
<b>Product Series:</b>	5000 Series Expanded Beam
<b>Max Insertion Loss:</b>	<2dB
<b>Avg Insertion Loss:</b>	<1.5dB
<b>Body Colour:</b>	Dark Grey
<b>Body Material:</b>	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
<b>Body Material Type:</b>	Plastic Body
<b>Contact Type:</b>	Expanded Beam
<b>Coupling Nut Retention Force:</b>	1Nm
<b>Coupling Type:</b>	Screw
<b>Diameter Over Coupling Ring Mm:</b>	30mm
<b>Fibre Mode:</b>	MM
<b>Flamability Rating:</b>	UL94V-0
<b>Function:</b>	EB Jam Nut Bulkhead Connector
<b>Ip Rating:</b>	IP68
<b>Material Finish:</b>	Matt
<b>Max Cable Entry Size:</b>	5mm
<b>Min Cable Entry Size:</b>	4.5mm
<b>Max Operating Temperature:</b>	+80°C
<b>Min Operating Temperature:</b>	-50°C
<b>Max Panel Thickness:</b>	4.7mm
<b>Rohs Compliant:</b>	Yes

**// Product PDF Links**
[5000 Series Expanded Beam Product...](#)
**// Product 3D CAD Model Links**
[PXEB5410MM45503D CAD Model](#)

 Have a question or project enquiry  
 you'd like to talk to us about?

[Click Here To Contact Us](#)