
## **PXF6050AAG** Datasheet



# Product Name // 150 M, OM3 Multi Mode, Cabled, Flex fiber connector

View Product Page

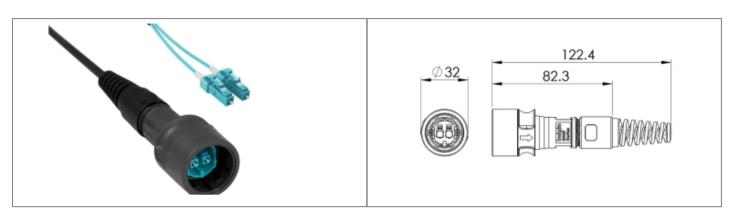

### // Product Description:

- O Flex Fiber Connector to LC type connector
- O Sealed to IP66, IP68, IP69K when mated with compatible connector
- O no cable options, or pre-terminated from 5M 450M available
- O Duplex LC type fiber connector

- O Choices of OS1, OM1 and OM3 cables for single or multimode
- O PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with Inline fiber connector or panel mount connectors PXF6051, PXF6052

#### // General Information:

Product Display Title: Product Family: Product Series: Body Material: Contact Type: Coupling Type: Diameter Over Coupling Ring Mm: Fibre Mode: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Flex Fiber Connector to LC type Connector Circular Fiber Connectors 6000 Series - Duplex LC Fiber Buccaneer Polyamide (PA) LC Fiber 30 Degree coupling 32mm OM3 UL94V-0 Flex to Double LC Connector Double Ended Fiber Cable IP66, IP68, IP69K +70°C -25°C

#### // Product PDF Links

6000 Series Fiber connectors...

// Product 3D CAD Model Links

PXF6050AAG3D CAD Model