


PXF6051AAA Datasheet

Product Name // 05 M, OM3 Multi Mode, Cabled, Inline fiber connector

[View Product Page](#)

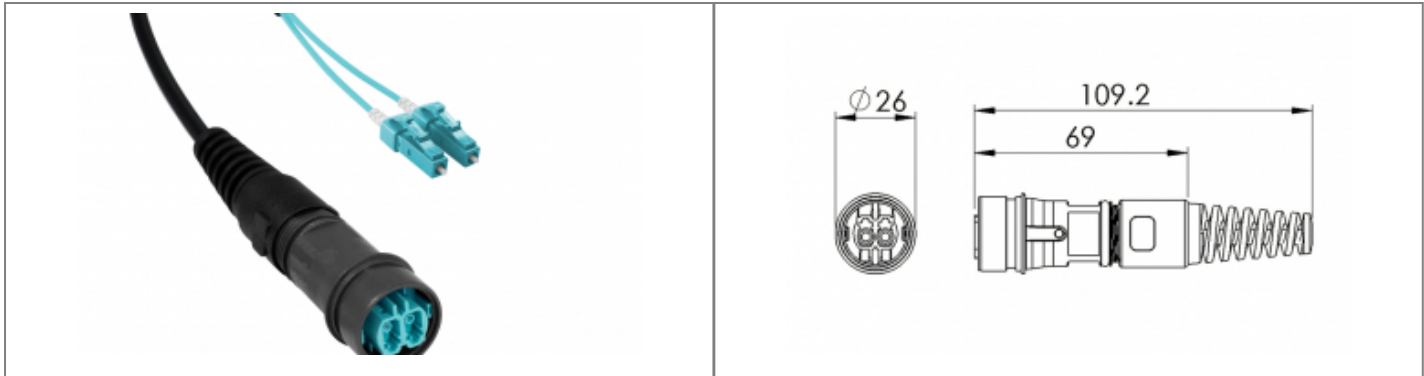

// Product Description:

- ⊕ Inline Fiber Connector to LC type connector
- ⊕ Sealed to IP66, IP68, IP69K when mated with compatible connector
- ⊕ no cable options, or pre-terminated from 5M - 450M available
- ⊕ Duplex LC type fiber connector
- ⊕ Choices of OS1, OM1 and OM3 cables for single or multimode
- ⊕ PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊕ Mate with flex fiber connector PXF6050

// General Information:

<p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Body Material:</p> <p>Contact Type:</p> <p>Coupling Type:</p> <p>Diameter Over Coupling Ring Mm:</p> <p>Fibre Mode:</p> <p>Flamability Rating:</p> <p>Function:</p> <p>Ip Rating:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p>	<p>Inline Fiber Connector to LC type Connector</p> <p>Circular Fiber Connectors</p> <p>6000 Series - Duplex LC Fiber Buccaneer</p> <p>Polyamide (PA)</p> <p>LC Fiber</p> <p>30 Degree coupling</p> <p>32mm</p> <p>OM3</p> <p>UL94V-0</p> <p>Inline to Double LC Connector Double Ended Fiber Cable</p> <p>IP66, IP68, IP69K</p> <p>+70°C</p> <p>-25°C</p>
---	---

// Product PDF Links

[6000 Series Fiber connectors...](#)

// Product 3D CAD Model Links

[PXF6051AAA3D CAD Model](#)