
Circular Data Connectors / 600 Series - Ethernet Buccaneer Connectors

PXM0609NSANBK6883 Datasheet



Product Name // Black Anodised Aluminium Plug Connector - Cable Entry: 6.88-8.38mm

🚯 View Product Page

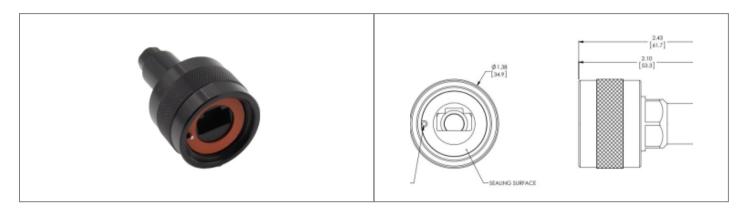

// Product Description:

- Black Anodised Aluminium Plug Connector Cable Entry: 6.88-8.38mm
- O IP68 rated when mated
- O Crimp Terminals
- O Durability >500 cycles

- Operating temperature -40°C to +100°C
- O Supports 10, 100 and 1,000 Mbps data transmissions
- O POE, POE+, and POE++
- O Hardware: Stainless Steel, Seals: Silicone

// General Information:

Product Display Title:
Product Family:
Product Series:
Body Colour:
Body Length:
Body Material:
Body Material Type:
Connection Method:
Contact Type:
Coupling Type:
Diameter Over Coupling Ring Mm:
Durability:
Ethernet Category:
Function:
Ip Rating:
Material Finish:
Max Cable Entry Size:
Min Cable Entry Size:
Min Operating Temperature:
Operating Humidity:
Max Operating Frequency:
Rohs Compliant:
Salt Spray Corrosion Test:
Shock Resistance:

Black Anodised Aluminium Plug Connector - Cable Entry: 6.88-8.38mm Circular Data Connectors 600 Series - Ethernet Buccaneer Connectors Black 61.7mm Aluminium Metal Body Standard RJ45 cable to be sourced Male Screw 35mm >500 cycles Any Plug Connector IP68 Anodised 8.38mm 6.88mm -40°C 43°C - 98% +100°C Yes 500hr 100G - 6ms

// Product PDF Links

Standard Series USB connectors...

// Product 3D CAD Model Links

PXM0609NSANBK68833D CAD Model