
PXM6011/02S/ST/0405/SN Datasheet



Product Name // Inline Cable Connector PXM6011 Series 2 **Contact Socket Screw Termination (contacts supplied** fitted) 4mm-5mm Cable (Dark Grey Gland) Metal Body With **Braid Termination**



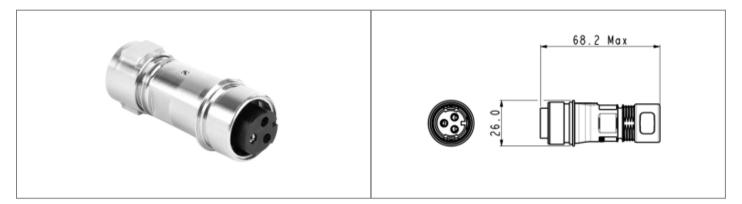

// Product Description:

- 0 Inline Cable Connectors
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- 0 2 Contacts
- 0 Screw contacts supplied fitted

- 0 Metal Body With Braid Termination
- 0 Cable acceptance 4mm-5mm diameter
- O Gland Pack PXP6088 available separately to accomodate all
- O PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Colour:

Body Material: Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size: Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Rohs Compliant:

Salt Spray Corrosion Test:

Voltage Max:

Inline Cable Connectors

Circular Power Connectors

6000 Series Buccaneer

UL

Metallic Grey Brass

Metal Body With Braid Termination Socket Contact

Push-Twist 16A, 11A

32mm

Inline Cable Connector $>10^6 M\Omega$ @500V DC

IP66, IP68, IP69K

5_{mm}

4mm 14AWG 14AWG 2.5mm2

2.5mm2 +120°C -40°C 2 Contacts

EN60068-2-11 Test Ka Salt Mist

277V

// Product PDF Links 6000 Series power connectors.



Click Here To Contact Us