
PXM6011/03P/ST/0910/SN Datasheet



Product Name // Inline Cable Connector PXM6011 Series 3
Contact Plug Screw Termination (contacts supplied fitted)
9mm-10mm Cable (Light Grey Gland) Metal Body With Braid
Termination



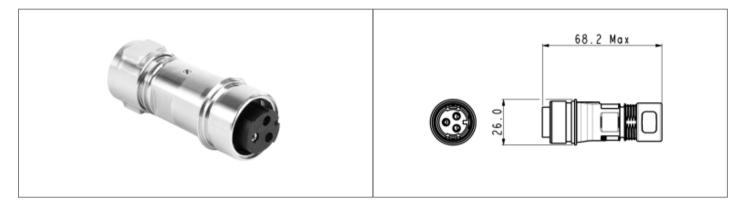

// Product Description:

- O Inline Cable Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- O Plug
- O 3 Contacts
- O Screw contacts supplied fitted

- Metal Body With Braid Termination
- Cable acceptance 9mm-10mm diameter
- Gland Pack PXP6088 available separately to accommodate all sizes
- PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Colour:

Body Material: Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size: Min Cable Entry Size:

Max Contact Accomodation Awg:

Min Contact Accomodation Awg:

Max Contact Accomodation Mm2: Min Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature: Number Of Contacts:

Rohs Compliant:

Salt Spray Corrosion Test:

Voltage Max:

Inline Cable Connectors

Circular Power Connectors 6000 Series Buccaneer

UL

Metallic Grey

Brass

Metal Body With Braid Termination Plug Contact

Push-Twist

16A, 11A

32mm

Inline Cable Connector >106MΩ @500V DC

IP66, IP68, IP69K

1966, 1968, 1969K

9mm

14AWG

14AWG

2.5mm2

2.5mm2

+120°C

-40°C 3 Contacts

Yes

EN60068-2-11 Test Ka Salt Mist

277V



