
## PXM6011/08P/CR/0910/SN Datasheet bulgin



Product Name // Inline Cable Connector PXM6011 Series 8 **Contact Plug Crimp/Solder Termination (contacts available** separately) 9mm-10mm Cable (Light Grey Gland) Metal **Body With Braid Termination** 



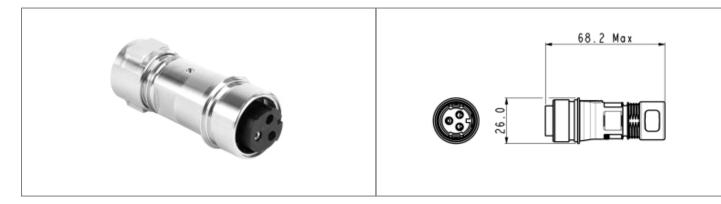

## // Product Description:

- Inline Cable Connectors 0
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Plug
- 0 8 Contacts
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Metal Body With Braid Termination
- 0 Cable acceptance 9mm-10mm diameter
- Gland Pack PXP6088 available separately to accomodate all
- PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6010 Series Flex Connectors

## // General Information:

**Product Display Title: Product Family:** 

**Product Series:** 

Approvals:

**Body Colour:** 

**Body Material:** 

**Body Material Type:** 

Contact Type:

Coupling Type: **Current Max:** 

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature:

Min Operating Temperature: **Number Of Contacts:** Rohs Compliant:

Salt Spray Corrosion Test:

Voltage Max:

Inline Cable Connectors

Circular Power Connectors

6000 Series Buccaneer UL

Metallic Grey

Brass

Metal Body With Braid Termination

Plug Contact Push-Twist 10A, 4A, 7A

32mm

Inline Cable Connector >106MΩ @500V DC

IP66, IP68, IP69K

10mm

20AWG

16AWG

1.5mm2

0.5mm2

+120°C

-40°C 8 Contacts

EN60068-2-11 Test Ka Salt Mist



