
Circular Power Connectors / 6000 Series Buccaneer

PXM6011/08S/CR/0709/SN Datasheet

View Product Page

Product Name // Inline Cable Connector PXM6011 Series 8 **Contact Socket Crimp/Solder Termination (contacts** available separately) 7mm-9mm Cable (Yellow Gland) Metal **Body With Braid Termination**

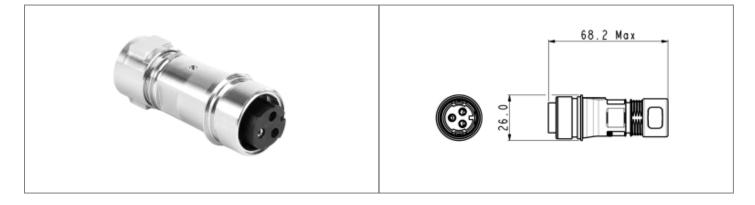

// Product Description:

- Inline Cable Connectors 0
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- 0 8 Contacts
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Metal Body With Braid Termination
- 0 Cable acceptance 7mm-9mm diameter
- 0 Gland Pack PXP6088 available separately to accomodate all sizes
- 0 PXM6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title: Product Family: **Product Series:** Approvals: Body Colour: **Body Material: Body Material Type:** Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Function: Insulation Resistance: Ip Rating: Max Cable Entry Size: Min Cable Entry Size: Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: **Rohs Compliant:** Salt Spray Corrosion Test: Voltage Max:

Inline Cable Connectors **Circular Power Connectors** 6000 Series Buccaneer UL Metallic Grey Brass Metal Body With Braid Termination Socket Contact Push-Twist 10A, 4A, 7A 32mm Inline Cable Connector >10⁶MΩ @500V DC IP66, IP68, IP69K 9mm 7mm 20AWG 16AWG 1.5mm2 0.5mm2 +120°C -40°C 8 Contacts Yes EN60068-2-11 Test Ka Salt Mist

// Product PDF Links 6000 Series power connectors.. L A L

6000 Series metal body power...

// Product 3D CAD Model Links

PXM6011/08S/CR/0709/SN3D CAD Model

277V

Have a question or project enquiry you'd like to talk to us about?

