
PXM6012/22P/CR Datasheet



Product Name // Front Panel Mount Connector PXM6012 Series 22 Contact Plug Crimp/Solder Termination (contacts available separately) Metal Body

View Product Page



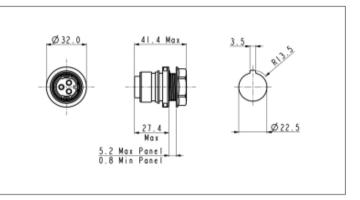

// Product Description:

- Front Panel Mount Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- O Plug
- O 22 Contacts

- O Crimp/solder termination with contacts and fitting tool available separately
- Metal Body
- PXM6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXM6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Function:

Insulation Resistance:

Ip Rating:

Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature: Max Panel Thickness:

Max Panel Thickness: Min Panel Thickness: Number Of Contacts: Panel Cut Out: Rohs Compliant:

Salt Spray Corrosion Test:

Thread Size: Voltage Max: Front Panel Mount Connectors

Circular Power Connectors 6000 Series Buccaneer

cUL, UL, VDE

Metallic Grey

Brass Metal Body

Plug Contact

Push-Twist 1.5A, 2A, 3A

32mm

Front Panel Mount Connector

>10⁶MΩ @500V DC

IP66, IP68, IP69K

26AWG 26AWG

0.13mm2

0.13mm2

+120°C -40°C

5.2mm

0.8mm

22 Contacts

22.50xR13.5-3.5mm

Yes

EN60068-2-11 Test Ka Salt Mist

M22x1.5-6g

60V

// Product PDF Links

- 6000 Series power connectors...
- 6000 Series metal body power...

// Product 3D CAD Model Links

PXM6012/22P/CR3D CAD Model