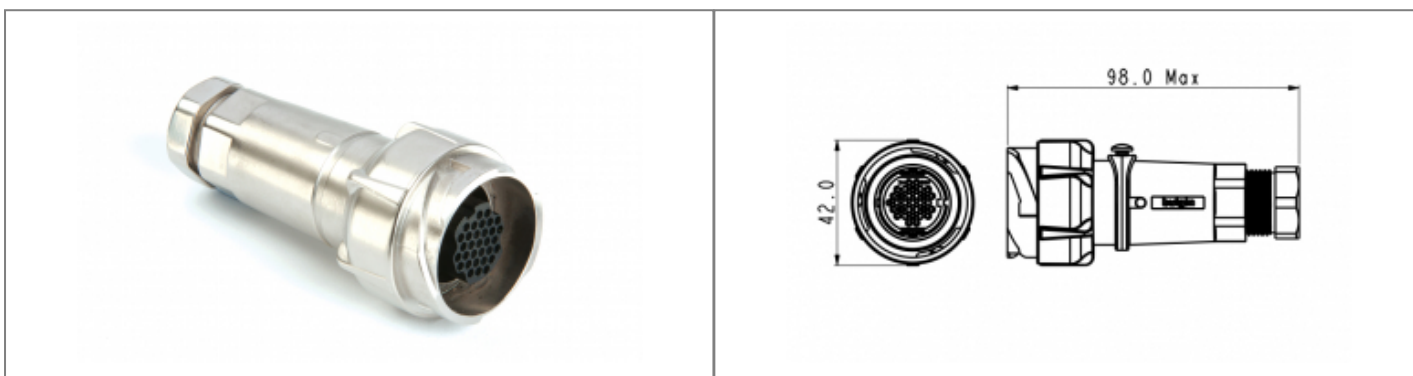


# PXM7011/06S/ST/0911/SN Datasheet

**Product Name // Inline Cable Connector PXM7011 Series 6**  
**Contact Socket Screw Termination (contacts supplied fitted) 9mm-11mm Cable (Black Gland) Metal Body With Braid Termination**

[View Product Page](#)


## // Product Description:

- ⊗ Inline Cable Connectors
- ⊗ Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- ⊗ Quick turn locking ring with less than quarter turn locking and positive feedback
- ⊗ Plug or Socket
- ⊗ 2, 3, 6, 10, 32 Contact with leading Earth contact on 3 Contact versions
- ⊗ Screw, Crimp/Solder terminations available, depending on part code; Screw contacts supplied fitted, Crimp/Solder contacts and fitting tools available separately
- ⊗ Choice of body material depending on part code:
- ⊗ Plastic body (part codes prefixed PXP)
- ⊗ Metal body (part codes prefixed PXM). Cable Braid Termination option supplied with part codes suffixed /SN or available separately (part code PXM7090)
- ⊗ Choice of cable acceptance 5mm-15mm diameter depending on part code (see data for details)
- ⊗ PXP7088 Series Gland Packs available separately to accommodate all sizes
- ⊗ PXP7082/PXM7082 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊗ Mate with PXP7010/PXM7010 Series Flex Connectors

## // General Information:

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Product Display Title:          | Inline Cable Connectors           |
| Product Family:                 | Circular Power Connectors         |
| Product Series:                 | 7000 Series Buccaneer             |
| Approvals:                      | UL                                |
| Body Material:                  | Zinc Alloy - Nickel Plated        |
| Body Material Type:             | Metal Body With Braid Termination |
| Contact Type:                   | Socket Contact                    |
| Coupling Type:                  | Bayonet Lock                      |
| Current Max:                    | 10A                               |
| Diameter Over Coupling Ring Mm: | 42mm                              |
| Flamability Rating:             | UL94V-0                           |
| Function:                       | Inline Cable Connector            |
| Ip Rating:                      | IP66                              |
| Max Cable Entry Size:           | 11mm                              |
| Min Cable Entry Size:           | 9mm                               |
| Max Contact Accomodation Awg:   | 17AWG                             |
| Min Contact Accomodation Awg:   | 17AWG                             |
| Max Contact Accomodation Mm2:   | 1mm2                              |
| Min Contact Accomodation Mm2:   | 1mm2                              |
| Max Operating Temperature:      | +120°C                            |
| Min Operating Temperature:      | -40°C                             |
| Number Of Contacts:             | 6 Contacts                        |
| Voltage Max:                    | 600V                              |

### // Product PDF Links

[7000 Series power connectors...](#)
[7000 Series metal body power...](#)

### // Product 3D CAD Model Links

[PXM7011/06S/ST/0911/SN3D CAD Model](#)


Have a question or project enquiry you'd like to talk to us about?



[Click Here To Contact Us](#)