
# PXP4040/B/5M00 Datasheet



# Product Name // Fully Overmoulded USB Cable PXP4040 Series USB Standard A Plug To Sealed Micro B Plug 5M Cable



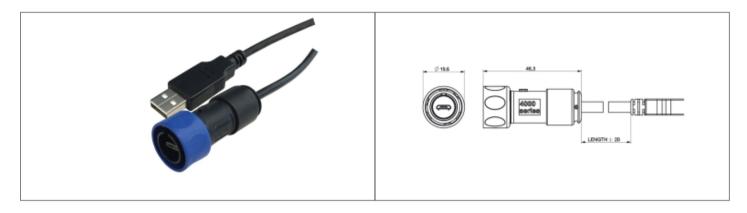

### // Product Description:

- O Pre-Wired Fully Overmoulded USB V2.0 Cable
- Sealed to IP66, IP68, IP69K when mated with compatible connector
- Standard USB Type A plug to Sealed Micro USB Type B plug
- O Choice of cable lengths depending on part code
- PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP4043 Rear Panel Mount Connector

#### // General Information:

Product Display Title: Pre-Wired Fully Overmoulded USB V2.0 Cable

Product Family: Circular Data Connectors

**Product Series:** 4000 Series - Micro USB Buccaneer

Body Material:PVCContact Type:Plug ContactCoupling Type:Screw

Current Max: 1A

Data Cable Type:USB Standard A Plug To Sealed Micro B PlugDiameter Over Coupling Ring Mm:19.7mm

Flamability Rating:

UL94V-0

Function:

Flex to Standard Connector Double Ended Cable

Ip Rating: IP66, IP68, IP69K

Max Operating Temperature: +70°C
Min Operating Temperature: 0°C

Number Of Contacts:5 ContactsVoltage Max:42V

## // Product PDF Links

4000 Series USB data connectors...

### // Product 3D CAD Model Links

PXP4040/B/5M003D CAD Model

Click Here To Contact Us