
## PXP4040/C/A/5M00 Datasheet



## Product Name // Fully Overmoulded USB Cable PXP4040/C/A Series USB Standard A Plug To Sealed C-Type Plug 5m Cable





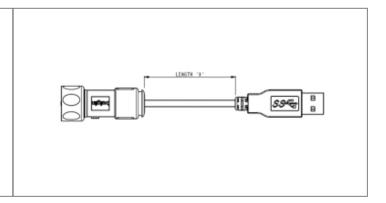

## // Product Description:

- Pre-Wired C-Type USB V3.2 Gen 1 Cable
- Standard USB Type A plug to Sealed C-Type USB plug
- 0 Sealed to IP66, IP67, IP68, IP69K when mated with compatible connector
- 5m cable length
- O PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP4043/C Rear Panel Mount Connector

## **General Information:**

**Product Display Title:** 

Product Family: **Product Series:** 

**Body Material:** 

Contact Type:

Coupling Type: Flamability Rating:

Function:

Ip Rating:

Min Operating Temperature: **Number Of Contacts:** 

Max Operating Temperature:

Pre-Wired C-Type USB V3.2 Gen 1 Cable

Circular Data Connectors

4000 Series - C-Type USB Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plug Contact

Bayonet Lock

UL94V-0

Flex to Standard Connector Double Ended Cable

IP67, IP68, IP69K

+70°C

-40°C

24 Contacts









PXP4040/C/A/5M003D CAD Model