


PXP4041/C/C/1M00 Datasheet

Product Name // Fully Overmoulded USB Cable

PXP4041/C/C Series USB Standard C Plug To Sealed C-Type Plug 1m Cable

[View Product Page](#)

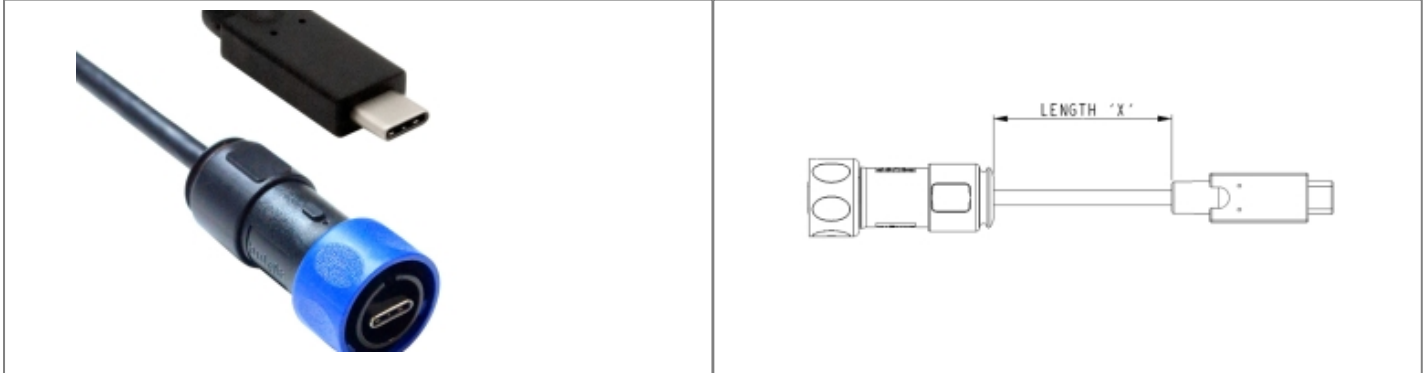

// Product Description:

- ⊕ Pre-Wired C-Type USB V3.2 Gen 2x2 Cable
- ⊕ Standard USB Type C plug to Sealed C-Type USB plug
- ⊕ Sealed to IP66, IP67, IP68, IP69K when mated with compatible connector
- ⊕ 1m cable length
- ⊕ PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊕ Mate with PXP4043/C Rear Panel Mount Connector

// General Information:

Product Display Title:	Pre-Wired C-Type USB V3.2 Gen 2x2 Cable
Product Family:	Circular Data Connectors
Product Series:	4000 Series - C-Type USB Buccaneer
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Cable Length:	1m
Contact Type:	Plug Contact
Coupling Type:	Bayonet Lock
Flamability Rating:	UL94V-0
Function:	Flex to Standard Connector Double Ended Cable
Ip Rating:	IP67, IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	-40°C
Number Of Contacts:	24 Contacts

// Product PDF Links

[C-Type Technical Product Datasheet](#)

// Product 3D CAD Model Links

[PXP4041/C/C/1M003D CAD Model](#)



Have a question or project enquiry you'd like to talk to us about?

[Click Here To Contact Us](#)