


PXP4041/C/C/3M00 Datasheet

Product Name // Fully Overmoulded USB Cable

PXP4041/C/C Series USB Standard C Plug To Sealed C-Type Plug 3m Cable

[View Product Page](#)

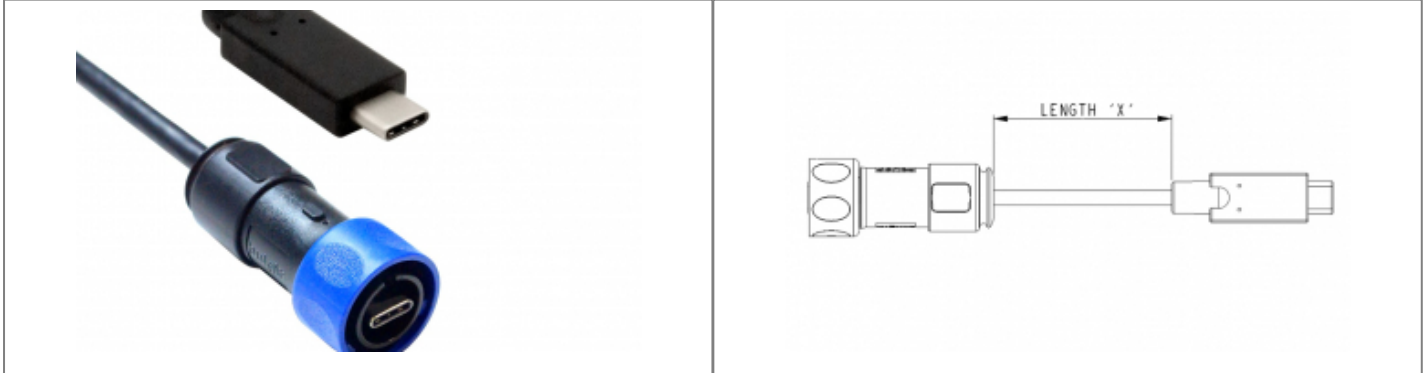

// Product Description:

- ⊞ Pre-Wired C-Type USB 3.2 Gen 2x2 Cable
- ⊞ Standard USB Type C plug to Sealed C-Type USB plug
- ⊞ Sealed to IP66, IP67, IP68, IP69K when mated with compatible connector
- ⊞ 3m cable length
- ⊞ PXP4081 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊞ Mate with PXP4043/C Rear Panel Mount Connector

// General Information:

| | |
|----------------------------|---|
| Product Display Title: | Pre-Wired C-Type USB V3.2 Cable |
| Product Family: | Circular Data Connectors |
| Product Series: | 4000 Series - C-Type USB Buccaneer |
| Body Material: | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| Cable Length: | 3m |
| Contact Type: | Plug Contact |
| Coupling Type: | Bayonet Lock |
| Flamability Rating: | UL94V-0 |
| Function: | Flex to Standard Connector Double Ended Cable |
| Ip Rating: | IP67, IP68, IP69K |
| Max Operating Temperature: | +80°C |
| Min Operating Temperature: | -40°C |
| Number Of Contacts: | 24 Contacts |

// Product PDF Links

[C-Type Technical Product Datasheet](#)

// Product 3D CAD Model Links

[PXP4041/C/C/3M003D CAD Model](#)