


PXP6010/03S/ST/0709 Datasheet

Product Name // Flex Cable Connector PXP6010 Series 3
Contact Socket Screw Termination (contacts supplied fitted) 7mm-9mm Cable (Yellow Gland) Plastic Body

[View Product Page](#)

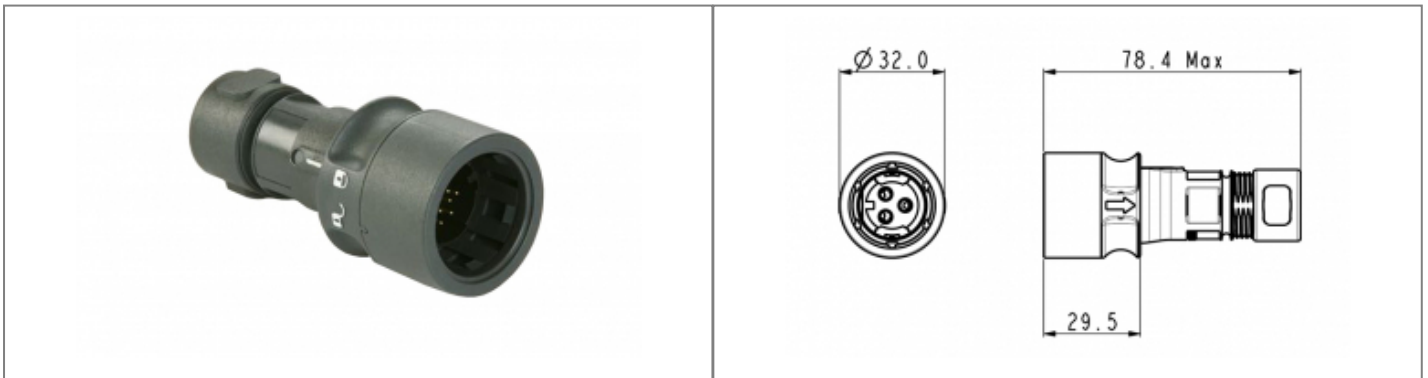

// Product Description:

- Flex Cable Connectors
- Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- Socket
- 3 Contacts
- Screw contacts supplied fitted
- Plastic Body
- Cable acceptance 7mm-9mm diameter
- Gland Pack PXP6088 available separately to accommodate all sizes
- PXP6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PXP6011 Series Inline, PXP6012 and PXP6014 Series Front Panel Mount Connectors

// General Information:

| | |
|---------------------------------|---|
| Product Display Title: | Flex Cable Connectors |
| Product Family: | Circular Power Connectors |
| Product Series: | 6000 Series Buccaneer |
| Approvals: | UL |
| Body Colour: | Grey |
| Body Material: | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| Body Material Type: | Plastic Body |
| Contact Type: | Socket Contact |
| Coupling Type: | Push-Twist |
| Current Max: | 16A, 11A |
| Diameter Over Coupling Ring Mm: | 32mm |
| Flamability Rating: | UL94V-0 |
| Function: | Flex Cable Connector |
| Insulation Resistance: | >10 ⁶ MΩ @500V DC |
| Ip Rating: | IP66, IP68, IP69K |
| Max Cable Entry Size: | 9mm |
| Min Cable Entry Size: | 7mm |
| Max Contact Accomodation Awg: | 14AWG |
| Min Contact Accomodation Awg: | 14AWG |
| Max Contact Accomodation Mm2: | 2.5mm ² |
| Min Contact Accomodation Mm2: | 2.5mm ² |
| Max Operating Temperature: | +120°C |
| Min Operating Temperature: | -40°C |
| Number Of Contacts: | 3 Contacts |
| Rohs Compliant: | Yes |
| Salt Spray Corrosion Test: | EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 |
| Voltage Max: | 277V |

// Product PDF Links

[6000 Series power connectors...](#)

[6000 Series metal body power...](#)

// Product 3D CAD Model Links

[PXP6010/03S/ST/07093D CAD Model](#)