
PXP6011/03S/ST/0709 Datasheet



Product Name // Inline Cable Connector PXP6011 Series 3 **Contact Socket Screw Termination (contacts supplied** fitted) 7mm-9mm Cable (Yellow Gland) Plastic Body





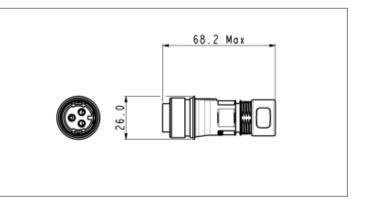

// Product Description:

- 0 Inline Cable Connectors
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- 0 3 Contacts
- 0 Screw contacts supplied fitted

- 0 Plastic Body
- 0 Cable acceptance 7mm-9mm diameter
- 0 Gland Pack PXP6088 available separately to accomodate all
- 0 PXP6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXP6010 Series Flex Connectors

// General Information:

Product Display Title: Product Family:

Product Series:

Approvals:

Body Colour:

Body Material:

Body Material Type: Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awa:

Min Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Min Contact Accomodation Mm2: Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts: Rohs Compliant:

Salt Spray Corrosion Test:

Voltage Max:

Inline Cable Connectors

Circular Power Connectors

6000 Series Buccaneer

UL

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

Socket Contact **Push-Twist**

16A, 11A

32mm

UL94V-0

Inline Cable Connector $>10^6 M\Omega$ @500V DC

IP66, IP68, IP69K

9mm 7mm

14AWG

14AWG 2.5mm2

2.5mm2

+120°C

-40°C

3 Contacts

EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

// Product PDF Links



// Product 3D CAD Model Links

PXP6011/03S/ST/07093D CAD Model