
PXP6011/08S/CR/0405 Datasheet



Product Name // Inline Cable Connector PXP6011 Series 8 **Contact Socket Crimp/Solder Termination (contacts** available separately) 4mm-5mm Cable (Dark Grey Gland) **Plastic Body**



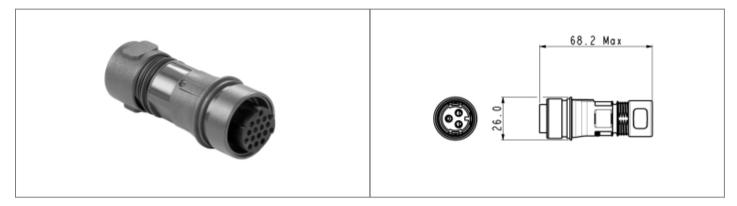

// Product Description:

- 0 Inline Cable Connectors
- 0 Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 0 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- 0 Socket
- 0
- 0 Crimp/solder termination with contacts and fitting tool available separately
- 0 Plastic Body
- 0 Cable acceptance 4mm-5mm diameter
- Ó Gland Pack PXP6088 available separately to accomodate all
- 0 PXP6082 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PXP6010 Series Flex Connectors

// General Information:

Product Display Title:

Product Family:

Product Series: Approvals:

Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating: **Function:**

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:

Min Contact Accomodation Awg: Max Contact Accomodation Mm2:

Min Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Rohs Compliant:

Salt Spray Corrosion Test:

Voltage Max:

Inline Cable Connectors

Circular Power Connectors

6000 Series Buccaneer

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

Socket Contact

Push-Twist

10A, 4A, 7A 32mm

UL94V-0

Inline Cable Connector

 $>10^6 M\Omega$ @500V DC

IP66, IP68, IP69K

5mm

20AWG

16AWG

1.5mm2

0.5mm2 +120°C

-40°C

8 Contacts

EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1

277V

// Product PDF Links





// Product 3D CAD Model Links PXP6011/08S/CR/04053D CAD Model