
PXP6012/03S/ST Datasheet



View Product Page

Product Name // Front Panel Mount Connector PXP6012 Series 3 Contact Socket Screw Termination (contacts supplied fitted) Plastic Body



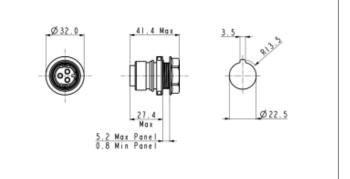

// Product Description:

- O Front Panel Mount Connectors
- O Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- O Socket
- O 3 Contacts

- O Screw contacts supplied fitted
- O Plastic Body
- O PXP6083 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PXP6010 Series Flex Connectors

// General Information:

Product Display Title: Product Family: **Product Series:** Approvals: Body Colour: **Body Material: Body Material Type:** Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Insulation Resistance: Ip Rating: Max Contact Accomodation Awg: Min Contact Accomodation Awg: Max Contact Accomodation Mm2: Min Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Max Panel Thickness: Min Panel Thickness: Number Of Contacts: Panel Cut Out: **Rohs Compliant:** Salt Spray Corrosion Test: Thread Size: Voltage Max:

Front Panel Mount Connectors **Circular Power Connectors** 6000 Series Buccaneer cUL, UL, VDE Grey Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Socket Contact Push-Twist 16A, 11A 32mm UL94V-0 Front Panel Mount Connector $>10^{6}M\Omega$ @500V DC IP66, IP68, IP69K 14AWG 14AWG 0.52mm2 0.52mm2 +120°C -40°C 5.2mm 0.8mm 3 Contacts 22.50xR13.5-3.5mm Yes EN60068-2-52 Test Kb Salt Mist (Cyclic) Marine Severity Level 1 M22x1.5-6g 277V



// Product 3D CAD Model Links

PXP6012/03S/ST3D CAD Model

Have a question or project enquiry you'd like to talk to us about?

Click Here To Contact Us