
PXP6034/B Datasheet



Product Name // Rewireable Flex Connector PXP6034 Series 4mm-7mm Cable Plastic Body

View Product Page

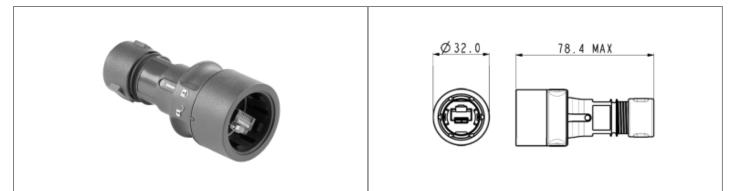

// Product Description:

- O Rewireable Flex Cable Connectors
- O Water and dustproof to IP66, IP68, IP69K when mated with compatible connector
- 30 degree push twist locking, tamperproof lock prevents accidental un-mating
- O Supplied with shielded RJ45 plug
- O Choice of cable acceptance depending on part code:
- O Part codes suffixed /A have cable glands optimised for PUR jacket cable to maintain CAT5e performance
- O Part codes suffixed /B accept cable 4mm-7mm diameter
- O Choice of body material depending on part code:
- O Plastic body (part codes prefixed PXP)
- O Metal body (part codes prefixed PXM)
- O PXP6081/PXM6081 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PXP6033TP, PXP6033TP/E, PXM6033TP Front Panel Mount CAT5e Couplers

// General Information:

Product Display Title: Product Family: Product Series: Approvals: Body Material: Body Material Type: Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Ethernet Category: Flamability Rating: Function: Ip Rating: Max Cable Entry Size: Min Cable Entry Size: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:

Rewireable Flex Cable Connectors Circular Data Connectors 6000 Series - Ethernet Buccaneer CSA, UL, VDE Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body Plug Contact Push-Twist 1.5A 32mm Cat 5e UL94V-0 Flex Cable Connector IP66, IP68, IP69K 7mm 4mm +120°C -40°C 8 Contacts 42V

// Product PDF Links

6000 Series Ethernet connectors...

6000 Series Ethernet connectors...

// Product 3D CAD Model Links

PXP6034/B3D CAD Model