
## PXPPVC12RAF03ACL100PVC Datasheet bulgin

## Product Name // M12 Series A Code PVC Right-Angle Overmould Flex Cable Connector 3 Contact Socket Pre-Wired With 10M PVC Jacket Cable





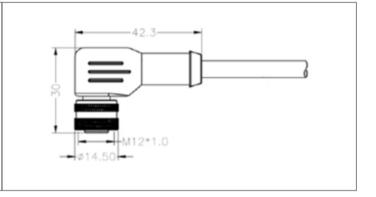

## // Product Description:

- M12 Series Right-Angle Overmould Flex Body Connectors
- Water and dustproof to IP67 when mated with compatible connector
- O Pin or Socket
- 3, 4, 5, 8, 12 Contact (3, 8, 12 Contact are A Code, 4 Contact are choice of A Code or D Code, 5 Contact are choice of A Code or B Code)
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- Choice of Sealing Caps available separately to maintain IP rating of unmated connectors
- Mate with M12 Series Inline Body and Panel Mount Connectors, depending on part code

## // General Information:

Product Display Title: M12 Series Right-Angle Overmould Flex Body Connectors

Product Family: Circular Automation Connectors

Product Series: M12 Series

Approvals: CSA, ENEC, UL, VDE

Body Material: PVC Cable Length: 10m

Contact Type: Socket Contact
Coupling Type: Screw

 Coupling Type:
 Screw

 Current Max:
 4A

 Diameter Over Coupling Ring Mm:
 20mm

Function: Right Angle Flex Connector Single Ended Cable

Ip Rating: IP67

Max Operating Temperature: +80°C

Min Operating Temperature: -25°C

 Number Of Contacts:
 3 Contacts

 Pin Layout Code:
 A Code

 Sheath Material:
 PVC

 Thread Size:
 M12 x 1

 Voltage Max:
 250V

// Product 3D CAD Model Links

PXPPVC12RAF03ACL100PVC3D CAD Mod

