


PXPTPU08FIM03ACL020PUR Datasheet

Product Name // M8 Series A Code TPU In-Line Overmould Flex Cable Connector 3 Contact Pins Pre-Wired With 2M PUR Jacket Cable

[View Product Page](#)

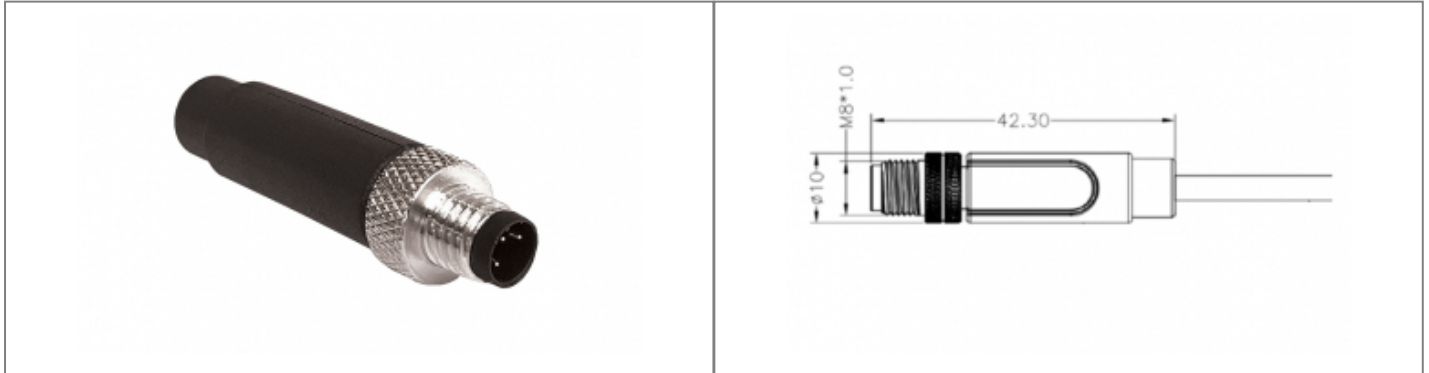

// Product Description:

- ⊞ M8 Series In-Line Overmould Flex Body Connectors
- ⊞ Water and dustproof to IP67 when mated with compatible connector
- ⊞ Pin only
- ⊞ 3, 4, 5 Contact (3, 4 Contact are A Code, 5 Contact are B Code)
- ⊞ Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- ⊞ Mate with M8 Series Flex Body and Panel Mount Connectors

// General Information:

Product Display Title:	M8 Series In-Line Overmould Flex Body Connectors
Product Family:	Circular Automation Connectors
Product Series:	M8 Series
Approvals:	CSA, ENEC, UL, VDE
Body Material:	TPU
Cable Length:	2m
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	3A
Diameter Over Coupling Ring Mm:	12.5mm
Function:	Inline Connector Single Ended Cable
Ip Rating:	IP67
Max Operating Temperature:	+80°C
Min Operating Temperature:	-25°C
Number Of Contacts:	3 Contacts
Pin Layout Code:	A Code
Sheath Material:	PUR
Thread Size:	M8 x 1
Voltage Max:	60V

// Product PDF Links

[M8 Series automation connectors...](#)

// Product 3D CAD Model Links

[PXPTPU08FIM03ACL020PUR3D CAD Mode](#)