


PXPTPU08FIM03ACL030PUR Datasheet

Product Name // M8 Series A Code TPU In-Line Overmould Flex Cable Connector 3 Contact Pins Pre-Wired With 3M PUR Jacket Cable

[View Product Page](#)

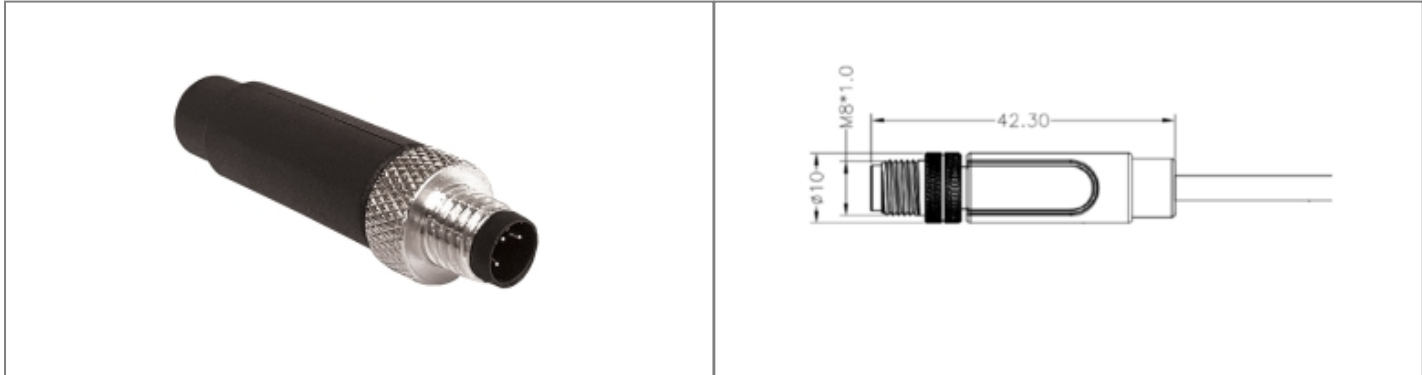

// Product Description:

- ⊗ M8 Series In-Line Overmould Flex Body Connectors
- ⊗ Water and dustproof to IP67 when mated with compatible connector
- ⊗ Pin only
- ⊗ 3, 4, 5 Contact (3, 4 Contact are A Code, 5 Contact are B Code)
- ⊗ Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- ⊗ Mate with M8 Series Flex Body and Panel Mount Connectors

// General Information:

<p>Product Display Title:</p> <p>Product Family:</p> <p>Product Series:</p> <p>Approvals:</p> <p>Body Material:</p> <p>Contact Type:</p> <p>Coupling Type:</p> <p>Current Max:</p> <p>Diameter Over Coupling Ring Mm:</p> <p>Function:</p> <p>Ip Rating:</p> <p>Max Operating Temperature:</p> <p>Min Operating Temperature:</p> <p>Number Of Contacts:</p> <p>Pin Layout Code:</p> <p>Sheath Material:</p> <p>Thread Size:</p> <p>Voltage Max:</p>	<p>M8 Series In-Line Overmould Flex Body Connectors</p> <p>Circular Automation Connectors</p> <p>M8 Series</p> <p>CSA, UL</p> <p>TPU</p> <p>Plug Contact</p> <p>Screw</p> <p>3A</p> <p>12.5mm</p> <p>Inline Connector Single Ended Cable</p> <p>IP67</p> <p>+80°C</p> <p>-25°C</p> <p>3 Contacts</p> <p>A Code</p> <p>PUR</p> <p>M8 x 1</p> <p>60V</p>
---	--

// Product PDF Links

[M8 Series automation connectors...](#)

// Product 3D CAD Model Links

[PXPTPU08FIM03ACL030PUR3D CAD Mode](#)