
RF292APG Datasheet



Product Name // 2.92 Straight Plug for STA 142, UFB142A, GORE 3507, 1401 Cable

View Product Page

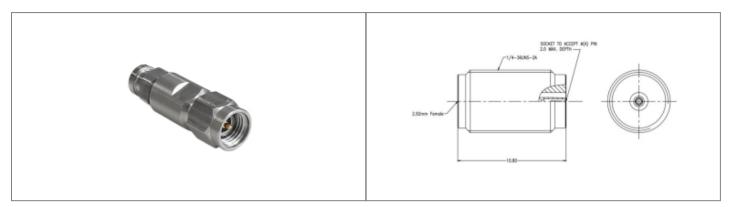

// Product Description:

- 2.92 Straight Plug for STA 142, UFB142A, GORE 3507, 1401
 Cable
- O Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- C Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series: Body Length: **Body Material: Centre Contact Retention Force:** Contact Pin Material: Min Coupling Torque: Max Coupling Torque: **Dielectric Withstanding Voltage: Durability:** Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Thread Size: Voltage Max: Vswr:

2.92mm Series Straight Connector **Radio Frequency Connectors** 2.92mm Series 26.90mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >750V >500 cycles Male RF Connector 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 0GHz 40GHz 1/4 36UNS 2A 250V <1.25

// Product PDF Links

2.92mm Series Product Datasheet

// Product 3D CAD Model Links

RF292APG3D CAD Model

Have a question or project enquiry you'd like to talk to us about?