
# **RFAA185J240J** Datasheet



# Product Name // 1.85mm Jack to 2.4mm Jack RF Adapter

## View Product Page

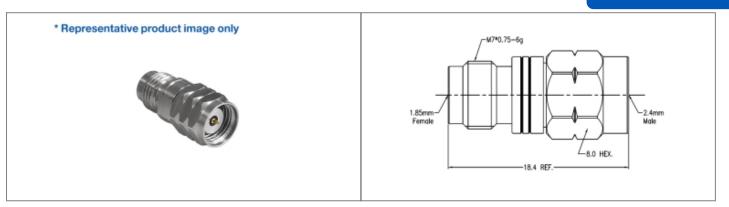

## // Product Description:

- O 1.85mm Jack to 2.4mm Jack RF Adapter
- O Maximum Voltage: 150V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### // General Information:

Product Display Title: **Product Family: Product Series:** Body Length: **Body Material: Centre Contact Retention Force:** Contact Pin Material: Min Coupling Torque: Max Coupling Torque: Dielectric Withstanding Voltage: Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Thread Size: Voltage Max: Vswr:

RF Adapter Series 1.85mm Straight Radio Frequency Connectors **RF** Adapter Series 19.50mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >500V >500 cycles Female to Female RF Adapter 50Ohm >5000MOhm ULTEM 1000/PEI +85°C -40°C 0GHz 50GHz M7x0.75 6g 150V <1.25

#### // Product PDF Links

RF Adapter Series Product...

// Product 3D CAD Model Links

RFAA185J240J3D CAD Model