


RFAA4SMAJSMAJ Datasheet

Product Name // SMA Jack to SMA Jack RF Adapter, 4 Hole Flange

[View Product Page](#)

* Representative product image only

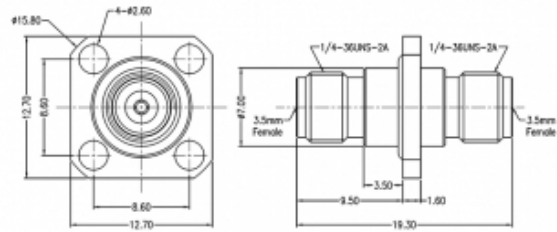

// Product Description:

- ⊗ SMA Jack to SMA Jack RF Adapter, 4 Hole Flange
- ⊗ Maximum Voltage: 335V
- ⊗ Temperature range: -65°C to +165°C
- ⊗ Frequency range: 0GHz - 26.5GHz
- ⊗ VSWR:
- ⊗ Dielectric withstanding Voltage: >750V
- ⊗ Impedance: 50Ohm
- ⊗ Body Material: Stainless Steel Passivation
- ⊗ Contact Material: Beryllium Copper

// General Information:

| | |
|----------------------------------|--|
| Product Display Title: | RF Adapter Series Flange Mount |
| Product Family: | Radio Frequency Connectors |
| Product Series: | RF Adapter Series |
| Body Length: | 17.60mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >26.7N |
| Contact Pin Material: | Beryllium Copper |
| Dielectric Withstanding Voltage: | >750V |
| Durability: | >500 cycles |
| Flange Mount Length: | 12.70mm |
| Function: | Female to Female RF Flange Mount Adapter |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | Adapter ASTM D 1710 |
| Max Operating Temperature: | +165°C |
| Min Operating Temperature: | -65°C |
| Mount Hole Distance: | 8.60mm |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 26.5GHz |
| Thread Size: | 1/4 36UNS 2A |
| Voltage Max: | 335V |
| Vswr: | <1.15 |

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAA4SMAJSMAJ3D CAD Model](#)