
RFAASMAPNJ Datasheet



Product Name // SMA Plug to N Plug RF Adapter

View Product Page

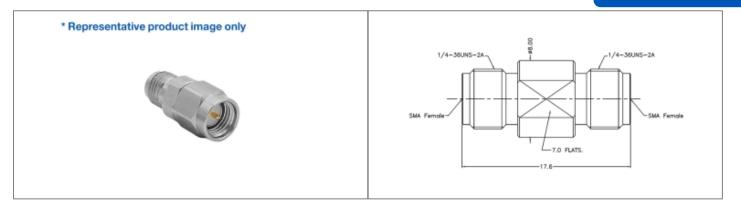

// Product Description:

- O SMA Plug to N Plug RF Adapter
- O Maximum Voltage: 335V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 18GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series: Body Length: Body Material: **Centre Contact Retention Force:** Contact Pin Material: **Dielectric Withstanding Voltage:** Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Voltage Max: Vswr:

RF Adapter Series SMA Straight Radio Frequency Connectors **RF** Adapter Series 39.00mm Stainless Steel Passivation >26.7N Beryllium Copper >750V >500 cycles Male to Male RF Adapter 50Ohm >5000MOhm Adapter ASTM D 1710 +85°C -40°C 0GHz 18GHz 335V <1.15

// Product PDF Links

RF Adapter Series Product...

// Product 3D CAD Model Links

RFAASMAPNJ3D CAD Model