


# RFAATNCPNCP Datasheet

## Product Name // TNC Plug to TNC Plug RF Adapter

[View Product Page](#)

\* Representative product image only

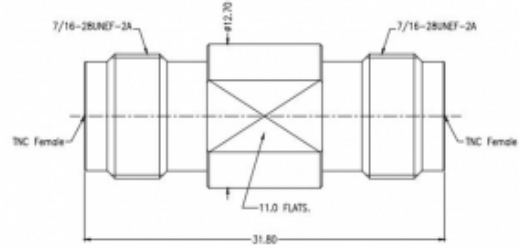

### // Product Description:

- ⊕ TNC Plug to TNC Plug RF Adapter
- ⊕ Maximum Voltage: 500V
- ⊕ Temperature range: -65°C to +165°C
- ⊕ Frequency range: 0GHz - 11GHz
- ⊕ VSWR:
- ⊕ Dielectric withstanding Voltage: >1500V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

### // General Information:

Product Display Title:	RF Adapter Series TNC Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Body Length:	34.40mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Function:	Male to Male RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	11GHz
Voltage Max:	500V
Vswr:	<1.15

#### // Product PDF Links

[RF Adapter Series Product...](#)

#### // Product 3D CAD Model Links

[RFAATNCPNCP3D CAD Model](#)


Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)