


## Product Name // N Jack Straight 4 Hole Flange RF Connector

[View Product Page](#)

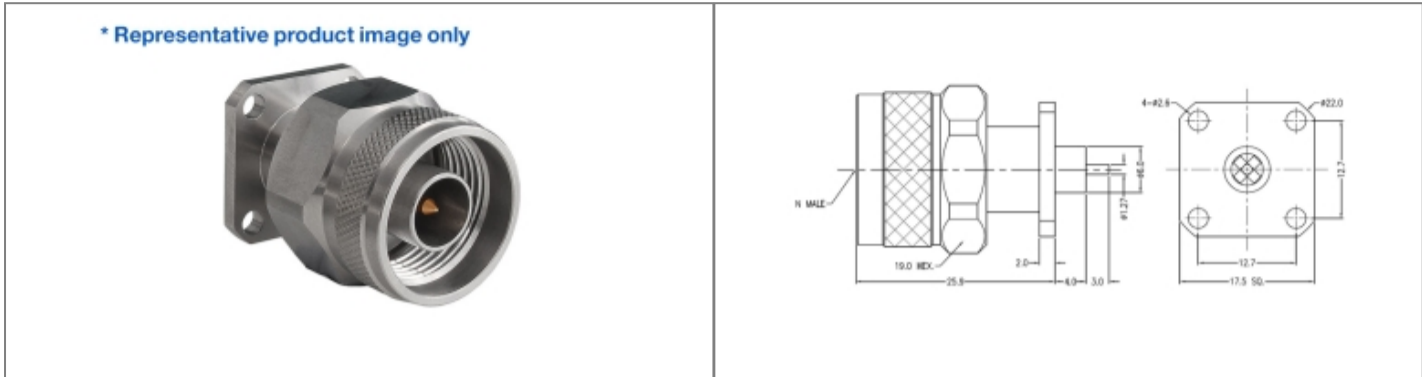

// Product Description:	
⊗ N Jack Straight 4 Hole Flange RF Connector	⊗ Dielectric withstanding Voltage: >1500V
⊗ Maximum Voltage: 500V	⊗ Impedance: 50Ohm
⊗ Temperature range: -55°C to +155°C	⊗ Body Material: Stainless Steel Passivation
⊗ Frequency range: 0GHz - 18GHz	⊗ Contact Material: Beryllium Copper
⊗ VSWR:	

// General Information:	
Product Display Title:	N Type Series Pin with Extended PTFE 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	N Type Series
Body Length:	19.00mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>1500V
Durability:	>500 cycles
Flange Mount Length:	12.70mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710 & PEI
Max Operating Temperature:	+155°C
Min Operating Temperature:	-55°C
Mount Hole Distance:	8.60mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Pin Diameter:	1.27mm
Pin Length:	3.00mm
Ptfe Diameter:	6.00mm
Ptfe Length:	4.00mm
Thread Size:	5/8 24UNEF 2A
Voltage Max:	500V
Vswr:	<1.30

// Product PDF Links

[N Type Series Product Datasheet](#)

// Product 3D CAD Model Links

[RFNA4JCCLGIE3D CAD Model](#)