


**Product Name // SMA Straight Jack 2 Hole Flange RF Connector**

[View Product Page](#)

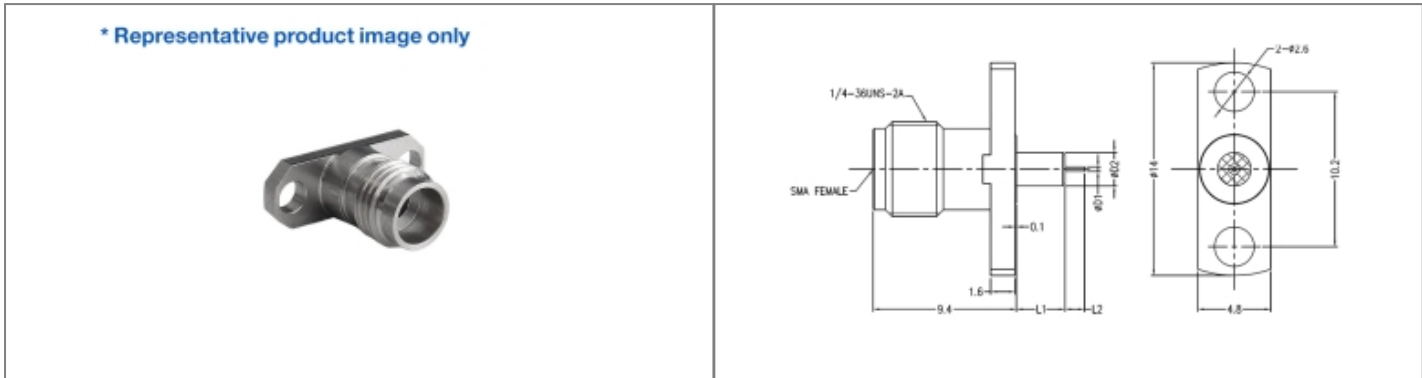

**// Product Description:**

<ul style="list-style-type: none"> <li>⊕ SMA Straight Jack 2 Hole Flange RF Connector</li> <li>⊕ Maximum Voltage: 335V</li> <li>⊕ Temperature range: -65°C to +165°C</li> <li>⊕ Frequency range: 0GHz - 26.5GHz</li> <li>⊕ VSWR:</li> </ul>	<ul style="list-style-type: none"> <li>⊕ Dielectric withstanding Voltage: &gt;750V</li> <li>⊕ Impedance: 50Ohm</li> <li>⊕ Body Material: Stainless Steel Passivation</li> <li>⊕ Contact Material: Beryllium Copper</li> </ul>
---	---

**// General Information:**

<p><b>Product Display Title:</b></p> <p><b>Product Family:</b></p> <p><b>Product Series:</b></p> <p><b>Body Length:</b></p> <p><b>Body Material:</b></p> <p><b>Centre Contact Retention Force:</b></p> <p><b>Contact Pin Material:</b></p> <p><b>Min Coupling Torque:</b></p> <p><b>Max Coupling Torque:</b></p> <p><b>Coupling Nut Retention Force:</b></p> <p><b>Dielectric Withstanding Voltage:</b></p> <p><b>Durability:</b></p> <p><b>Flange Mount Length:</b></p> <p><b>Function:</b></p> <p><b>Impedance:</b></p> <p><b>Insulation Resistance:</b></p> <p><b>Insulator:</b></p> <p><b>Max Operating Temperature:</b></p> <p><b>Min Operating Temperature:</b></p> <p><b>Mount Hole Distance:</b></p> <p><b>Min Operating Frequency:</b></p> <p><b>Max Operating Frequency:</b></p> <p><b>Pin Diameter:</b></p> <p><b>Pin Length:</b></p> <p><b>Ptfe Diameter:</b></p> <p><b>Ptfe Length:</b></p> <p><b>Thread Size:</b></p> <p><b>Voltage Max:</b></p> <p><b>Vswr:</b></p>	<p>SMA Series Pin with Extended PTFE 2 Hole Flange</p> <p>Radio Frequency Connectors</p> <p>SMA Series</p> <p>9.40mm</p> <p>Stainless Steel Passivation</p> <p>&gt;26.7N</p> <p>Beryllium Copper</p> <p>0.80Nm</p> <p>1.10Nm</p> <p>&gt;27.2Kg</p> <p>&gt;750V</p> <p>&gt;500 cycles</p> <p>14.00mm</p> <p>Female Flange Mount RF Connector</p> <p>50Ohm</p> <p>&gt;5000MOhm</p> <p>Adapter ASTM D 1710</p> <p>+165°C</p> <p>-65°C</p> <p>10.20mm</p> <p>0GHz</p> <p>26.5GHz</p> <p>0.30mm</p> <p>1.27mm</p> <p>2.20mm</p> <p>3.20mm</p> <p>1/4 36UNS 2A</p> <p>335V</p> <p>&lt;1.30</p>
--	--

**// Product PDF Links**

[SMA Series Product Datasheet](#)

**// Product 3D CAD Model Links**

[RFSMAA2JDFACDD3D CAD Model](#)

Have a question or project enquiry you'd like to talk to us about?

[Click Here To Contact Us](#)