
# **RFTERM240P1W** Datasheet



## Product Name // 2.40mm Plug Termination (1W)

🚯 View Product Page

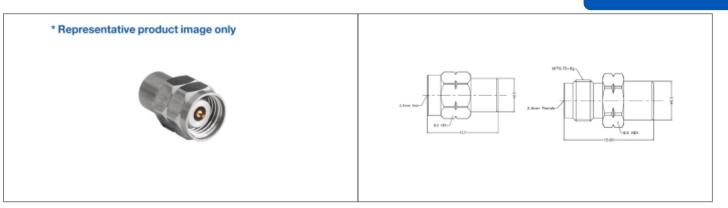

### // Product Description:

- O 2.40mm Plug Termination (1W)
- O Maximum Voltage: 335V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### // General Information:

Product Display Title: **Product Family:** Product Series: Average Power: Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: Dielectric Withstanding Voltage: Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Voltage Max: Vswr:

**RF** Termination Series 2.40mm Radio Frequency Connectors **RF** Termination Series <1W 13.70mm Stainless Steel Passivation >26.7N Beryllium Copper >750V >500 cycles Male RF Termination 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 0GHz 50GHz 335V <1.30

#### // Product PDF Links

RF Termination Series Product...

// Product 3D CAD Model Links

RFTERM240P1W3D CAD Model