
RFTERM292J05W Datasheet



Product Name // 2.92mm Jack Termination (0.5W)

View Product Page

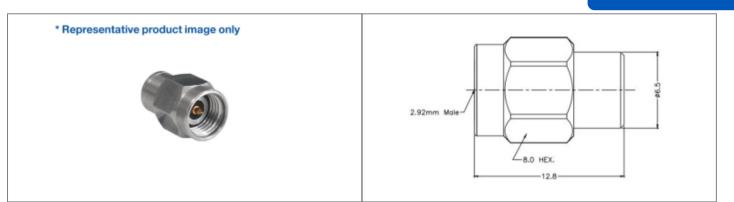

// Product Description:

- O 2.92mm Jack Termination (0.5W)
- O Maximum Voltage: 335V
- O Temperature range: -65°C to +165°C
- O Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: **Product Family: Product Series:** Average Power: Body Length: Body Material: Centre Contact Retention Force: Contact Pin Material: **Dielectric Withstanding Voltage:** Durability: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency: Thread Size: Voltage Max: Vswr:

RF Termination Series 2.92mm **Radio Frequency Connectors RF** Termination Series <0.5W 12.20mm Stainless Steel Passivation >26.7N Beryllium Copper >750V >500 cycles Female RF Termination 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +165°C -65°C 0GHz 40GHz 1/4 36UNS 2A 335V <1.20

// Product PDF Links

RF Termination Series Product...

// Product 3D CAD Model Links

RFTERM292J05W3D CAD Model