
# RFTERMSMAJ1W Datasheet



# Product Name // SMA Jack Termination (1W)

**View Product Page** 



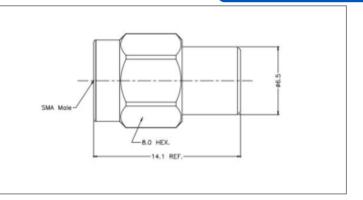

## // Product Description:

- O SMA Jack Termination (1W)
- 0 Maximum Voltage: 335V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 18GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

# **General Information:**

**Product Display Title:** 

**Product Family:** 

**Product Series:** Average Power:

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Dielectric Withstanding Voltage:

Durability: Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Min Operating Frequency: Max Operating Frequency:

Thread Size: Voltage Max: Vswr:

RF Termination Series SMA

Radio Frequency Connectors

**RF Termination Series** 

<1W

13.00mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

>750V

>500 cycles

Female RF Termination

500hm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C 0GHz

18GHz

1/4 36UNS 2A 335V

<1.15

### // Product PDF Links



### // Product 3D CAD Model Links

