
RFTNCAA4JCCFFGE Datasheet



Product Name // TNCA Jack Straight 4 Hole Flange RF Connector

View Product Page



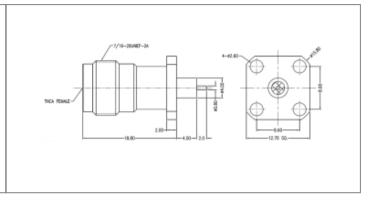

// Product Description:

- 0 TNCA Jack Straight 4 Hole Flange RF Connector
- 0 Maximum Voltage: 500V
- 0 Temperature range: -65°C to +165°C
- 0 Frecuency range: 0GHz - 11GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >1500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length: Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size: Voltage Max:

Vswr:

TNCA Series Pin with Extended PTFE 4 Hole Flange

Radio Frequency Connectors

TNCA Series

18.80mm

Stainless Steel Passivation

>26.7N

Beryllium Copper

0.80Nm

1.10Nm

>1500V >500 cycles

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

Adapter ASTM D 1710

+165°C -65°C 8.60mm

0GHz 11GHz

0.80mm 2.00mm

4.00mm 4.00mm

7/16 28UNEF 2A

500V <1.30

// Product PDF Links



TNCA Series Product Datasheet

// Product 3D CAD Model Links



RFTNCAA4JCCFFGE3D CAD Model